



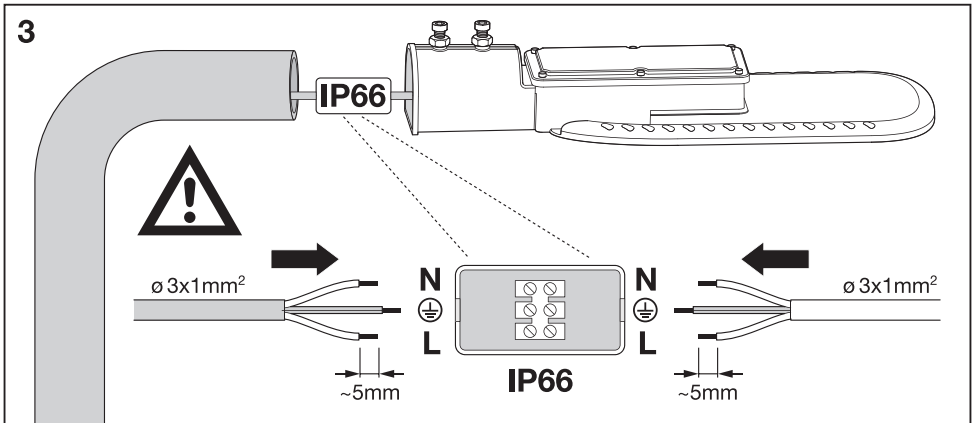
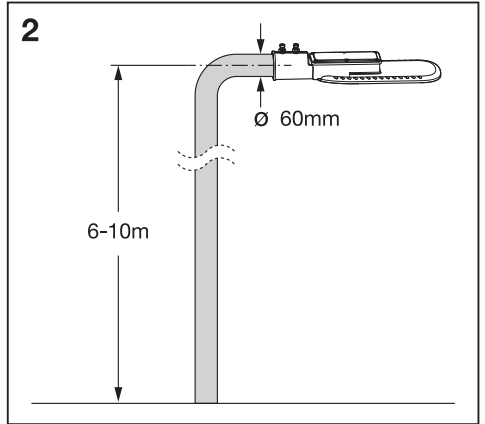
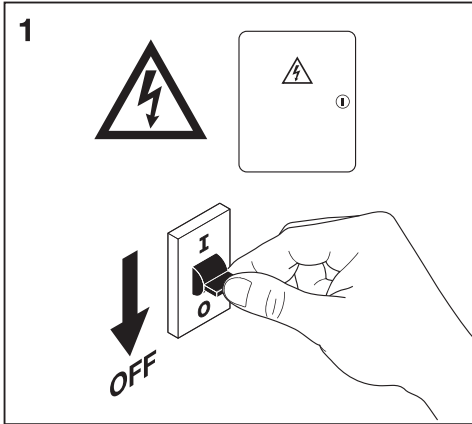
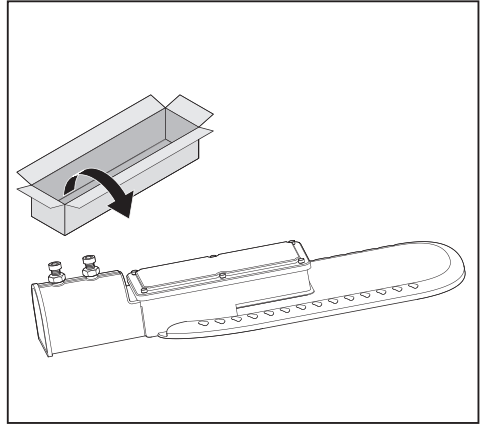
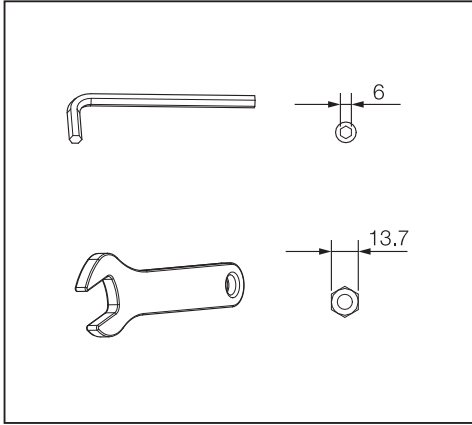
STREETLIGHT ECO




عراش لاء ءوض ىءا





	W _R	CCT	V _{AC}	Hz	Input current (A)	IP	L x W x H (mm)	Projected Area (m ²)		Ta (°C)
LDECO-STL-XL-AM	90W	3000K/4000K/6500K	100-240	50/60	435mA	66	551 x 215 x 90	0.118	3.3KG	-30 ~ 50
LDECO-STL-XLHO-AM	120W	3000K/4000K/6500K	100-240	50/60	580mA	66	551 x 215 x 90	0.118	3.4KG	-30 ~ 50
LDECO-STL-XXL-AM	150W	3000K/4000K/6500K	100-240	50/60	725mA	66	653 x 273 x 90	0.178	4.35KG	-30 ~ 50

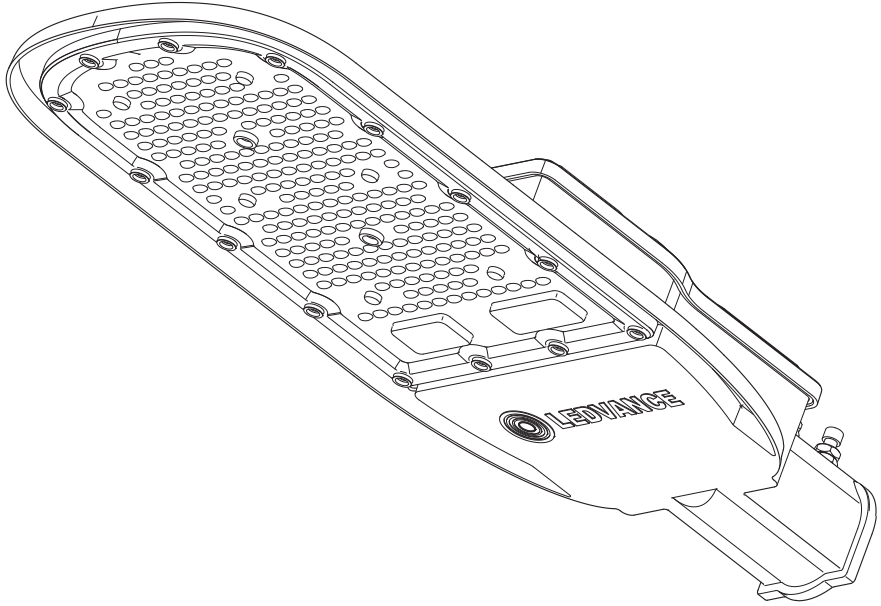



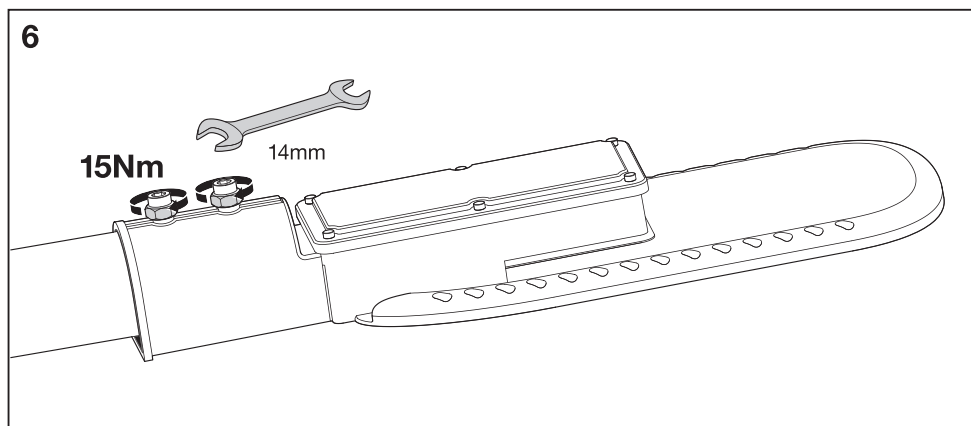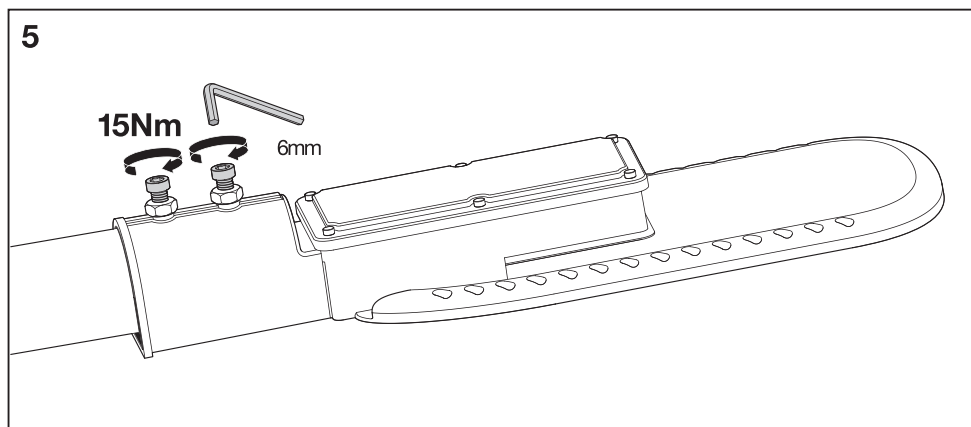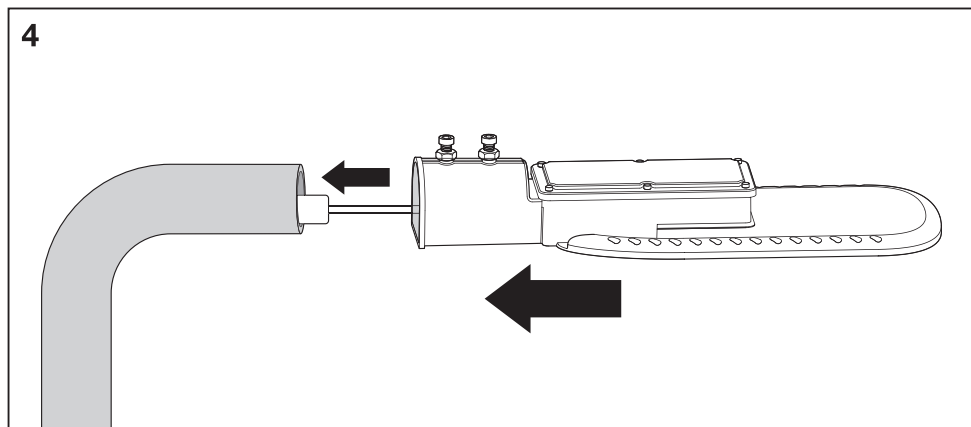

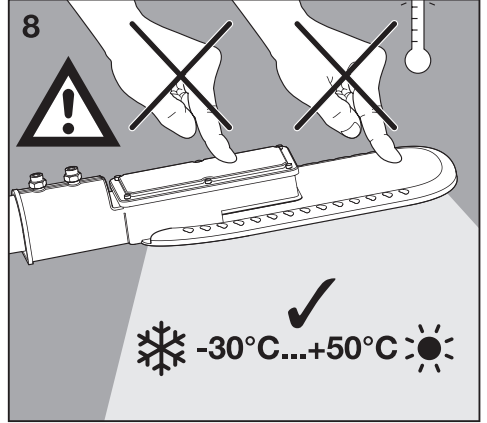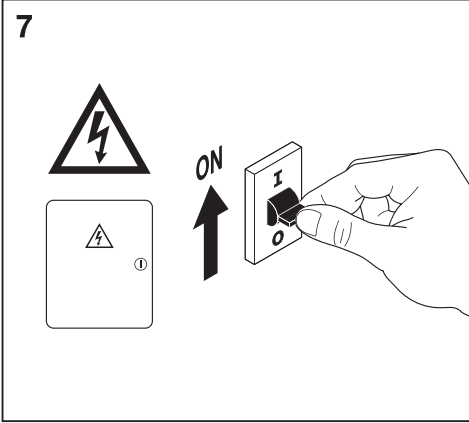

Warning:

- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Do not touch the luminaire in operative status.
- The light source contained in this luminaire shall be only replaced by the manufacturer or his service agent or a similar qualified person.
- The luminaire are not allowed to disassemble by non specialists.
- Range mounting height 6-10m.
- Suitable for outdoor.
- Electronic controlgear for LED modules to 100°C, LED module to 100°C.
- Please note that the fixture is equipped with standard surge protection only. To project the fixture from sags, surges, and lightning strikes, additional surge protectors must be deployed on the primary side.

ري ذحت

- صخش وأ ؤم ؤخ ل ل يكو وأ ؤع نصل م ل ؤك رش ل ل ب ق ن م ي رصح لك شب ه ل ؤا دب ت سا ب ج ي ، اف ا ت ه ر ا ن ا ل ه ذ ه ل ن ر م ل ي ر ا خ ل ا ل ك ل ل س ل ا و أ ل ب ا ك ل ل ن ا ك ا ذ ا
- ر ط خ ل ل ب ن ج ت ل ل ج أ ن م ل ث ا م م ل ه ؤ م
- ل ي ك و أ و ع ن ص م ل ا ق ي ر ط ن ع ط ق ف ؤ ر ا ن ا ل ؤ د ح و ي ف ؤ و ج و م ل ا ؤ و ض ل ا ر د ص م ل ا د ب ت سا ب ج ي
- ن ي ص خ ت م ل ا ر ي غ ل ب ق ن م ه ر ا ن ا ل ا ح ا ب ص م ت ا د ح و ك ي ك ف ت ب ح م س ي ا
- ع ا ف ت ر ا ل ي ص ق ا 6-12 ؤ ر ا ن ا ل ا ع ا ف ت ر ا ق ا ط ن
- ؤ ي ر ا خ ل ا ت ا ق ي ب ط ل ل ب س ا ن م
- ؤ ي و ئ م ؤ ج ر د 100 Tc ؤ ر ا ن ا ل ا ت ا د ح و ل ي ن و ر ت ك ل ل ل ا ل و ح م ل ا
- ي ؤ ا ب ر ه ك ل ا ر ا ي ت ل ل ل ا ع ا ل ق ف د ت ل ا ن م ج ت ن م ل ا ؤ ي ا م ح ل ؤ ي ا م ح ل . ط ق ق ؤ ي س ا ل ا ي ؤ ا ب ر ه ك ل ا ر ا ي ت ل ل ا ؤ ي ا م ح ؤ د ح و ب ز ه ج م ج ت ن م ل ا ن ؤ ط ا ح ل م ي ج ي
- ؤ ي س ا س أ ل ا ؤ ي ا م ح ل ؤ د ح و ع م ؤ ي ف ا ض ا ي ؤ ا ر ه ك ر ا ي ت ؤ ي ا م ح ؤ د ح و ر ي ف و ت ب ج ي

©LEDVANCE Pvt. Ltd.
1201 - 1202, 12th Floor, Signature Towers, Tower - A,
South City -I, Gurugram - 122001, Haryana (India)
Consumer care (Name and address as per above),
Consumer care Tel. No. 0124-4150100
E-mail id: customercare@ledvance.com
www.ledvance.in

©LEDVANCE Sdn, Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti, 46200 Petaling
Jaya, Selangor Darul Ehsan, Malaysia

©LEDVANCE Middle East FZE
Jebel Ali Free Zone, JAFZA 16, Office 603
P.O. Box 17476, Dubai - UAE

©LEDVANCE Pte Ltd.
988 Toa Payoh North, # 03-06,
Singapore 319002

©LEDVANCE Prosperity Co., Ltd.
20/F Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

©(주) 레드밴스
서울시 강남구 삼성로 554 예성빌딩 6층
(우편번호 06165)
전화번호 : +82 80 4891 700
www.ledvance.co.kr



TIS.1955-2551



IP66 IK08 RoHS

C10449057

G11116171
2021-03-10

www.ledvance.com