



STREETLIGHT ECO LITE

30W/ 50W/ 100W/ 150W

عراش لاء عوض ى دأ

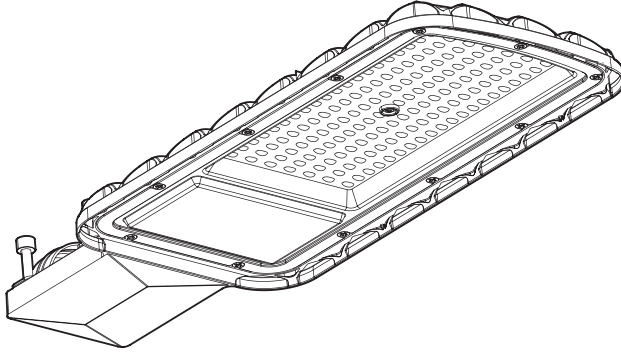




	W_R	CCT	Cover material	VAC	Hz	Input current (A)	IP	Dimension (mm)	Projected Area (m ²)		Ta (°C)
LDECO-LITE-ST-MI-WG-AM	30W	3000K/4000K/6500K	Tempered glass	220-240	50/60	130mA	65	293x126x53	0.037	650g	-25~45
LDECO-LITE-ST-S-WG-AM	50W	3000K/4000K/6500K	Tempered glass	220-240	50/60	220mA	65	347x136x53	0.047	680g	-25~45
LDECO-LITE-ST-M-WG-AM	100W	3000K/4000K/6500K	Tempered glass	220-240	50/60	450mA	65	455x170x53	0.077	1120g	-25~45
LDECO-LITE-ST-L-WG-AM	150W	3000K/4000K/6500K	Tempered glass	220-240	50/60	640mA	65	550x200x53	0.11	1540g	-25~45
LDECO-LITE-ST-MI-WL-AM	30W	3000K/4000K/6500K	PC	220-240	50/60	130mA	65	293x126x53	0.037	650g	-25~45
LDECO-LITE-ST-S-WL-AM	50W	3000K/4000K/6500K	PC	220-240	50/60	220mA	65	347x136x53	0.047	680g	-25~45
LDECO-LITE-ST-M-WL-AM	100W	3000K/4000K/6500K	PC	220-240	50/60	450mA	65	455x170x53	0.077	1120g	-25~45
LDECO-LITE-ST-L-WL-AM	150W	3000K/4000K/6500K	PC	220-240	50/60	640mA	65	550x200x53	0.11	1540g	-25~45

IP65


IK07



LEDVANCE

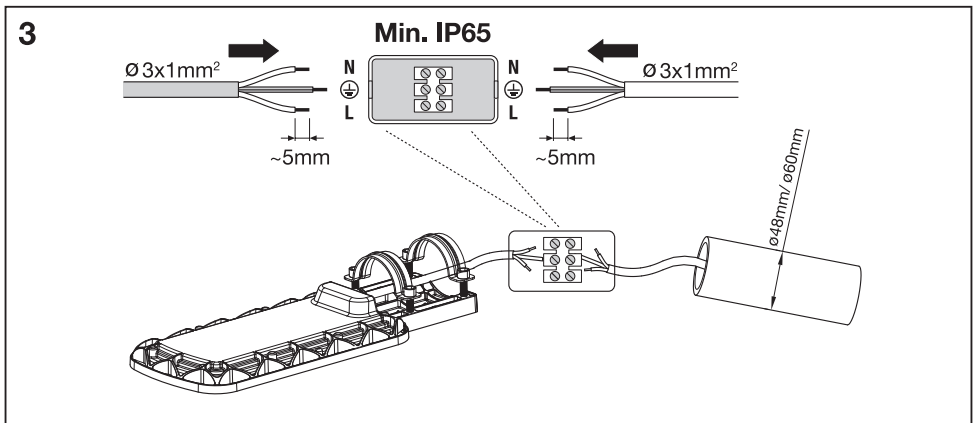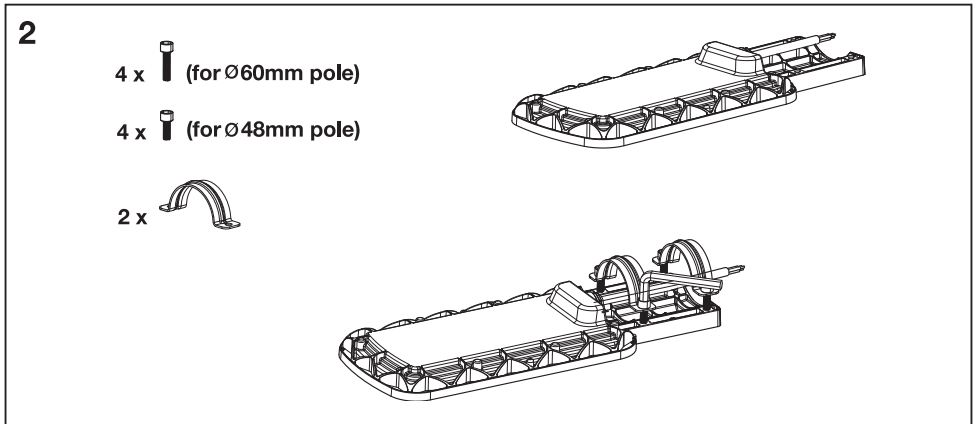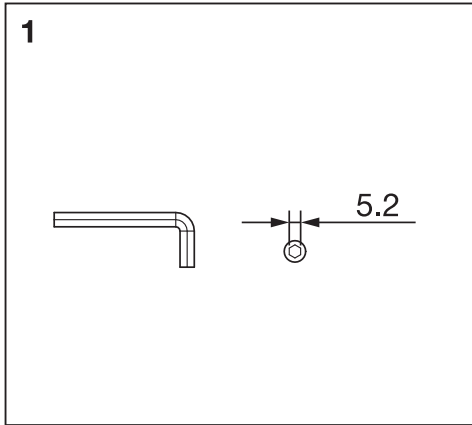

4

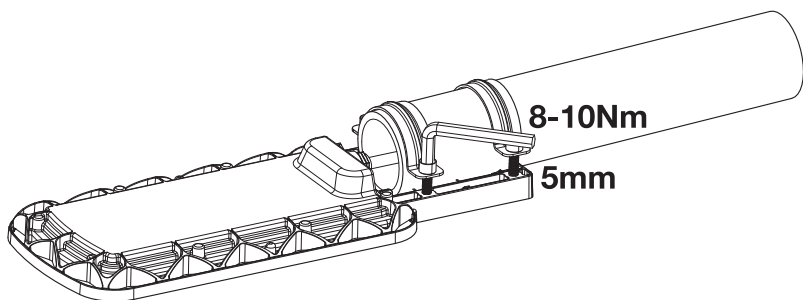

Warning:

- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Do not touch the luminaire in operative status.
- With Tempered Glass Cover version: the light source of the luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
- With PC Lens version: the light source contained in the luminaire shall be only be replaced by the manufacturer or his service agent or a similar qualified person.
- The luminaire are not allowed to disassemble by non specialists.
- Range mounting height 5-10m.
- Suitable for outdoor.
- Electronic controlgear for LED modules to 100°C, LED module to 100°C.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from surges, lightning strikes, additional surge protectors must be deployed on the primary side.

ريذحت

لجأ ن لم شامم لهؤم شخس وأ ةمدخل الليكو وأ ةمصم ةكترش لل لبق نم يرصح لكشبه لادب تسا بجي ، افلات هران ال هذله نرم لل چراخل لكلسل وأ لبلك ناك اذا
- رطخل البنجت
- لادب تسا نكمي ال فاشك ال اذه يف ةمدختسم ال ديل ةدحو
- ني صم شامم ال ريغ لبق نم هران ال اح اصم تادحو كي كفتب حمسي ا
- عافترا ي صق 10-5 تي بئتلل عافترا قاطن
- ةي چراخل تاقب بئتلل بسانم
ةدحو ريفوت بجي ، يئابره لك ال رايت لل ال اعلا قفدتلل نم جت نم ال احمي ةي امجل . طقف ةي ساس ال ا يئابره لك ال رايت ل ةي امح ةدحو ب زهجم جت نم ال ا ةظالم ي جري
- ةي ساس ال ةي امجل ةدحو عم ةي فاضا ، يئابره رايت ةي امح

SGP LEDVANCE Pte Ltd.
988 Toa Payoh North, # 03-06,
Singapore 319002

HK LEDVANCE Prosperity Co., Ltd.
20/F Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

UAE LEDVANCE Middle East FZE
Jebel Ali Free Zone, JAFZA 16, Office 603
P.O. Box 17476, Dubai – UAE

ROK (주) 레드밴스
서울시 강남구 삼성로 554 예성빌딩 6층
(우편번호 06165)
전화번호 : +82 80 4891 700
www.ledvance.co.kr

IND LEDVANCE Pvt. Ltd.
1201 – 1202, 12th Floor, Signature Towers, Tower – A,
South City –I, Gurugram – 122001, Haryana (India)
Consumer care (Name and address as per above),
Consumer care Tel. No. 0124-4150100
E-mail Id: customercare@ledvance.com
www.ledvance.in

MY LEDVANCE Sdn. Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti, 46200 Petaling
Jaya, Selangor Darul Ehsan, Malaysia

IP65 IK07 RoHS



TIS. 1955-2551

C10449057

G11116380

2021-03-11

www.ledvance.com