




LED SUPERIOR DOWNLIGHT







داون لایت






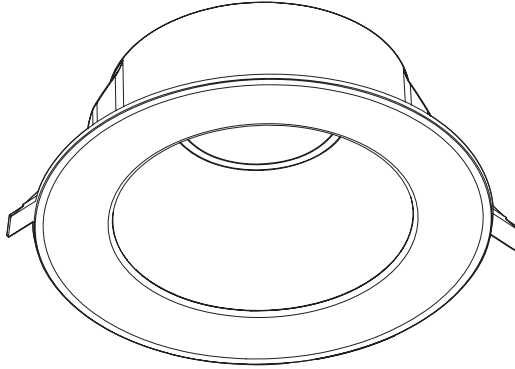


MODEL	W	K	Ø x H (mm)	IP (exposed part)		Ra	Ta (°C)	VAC	Hz	
P-DL-R105-6W-WV-G3-930	6W	3000K	132x50	IP54	70°	90	-20...+45°C	100-277V	50/60	260g
P-DL-R105-6W-WV-G3-940	6W	4000K	132x50	IP54	70°	90	-20...+45°C	100-277V	50/60	260g
P-DL-R105-6W-WV-G3-965	6W	6500K	132x50	IP54	70°	90	-20...+45°C	100-277V	50/60	260g
P-DL-R150-9W-WV-G3-930	9W	3000K	180x65	IP54	70°	90	-20...+45°C	100-277V	50/60	410g
P-DL-R150-9W-WV-G3-940	9W	4000K	180x65	IP54	70°	90	-20...+45°C	100-277V	50/60	410g
P-DL-R150-9W-WV-G3-965	9W	6500K	180x65	IP54	70°	90	-20...+45°C	100-277V	50/60	410g
P-DL-R150-12W-WV-G3-930	12W	3000K	180x65	IP54	70°	90	-20...+45°C	100-277V	50/60	410g
P-DL-R150-12W-WV-G3-940	12W	4000K	180x65	IP54	70°	90	-20...+45°C	100-277V	50/60	410g
P-DL-R150-12W-WV-G3-965	12W	6500K	180x65	IP54	70°	90	-20...+45°C	100-277V	50/60	410g
P-DL-R190-15W-WV-G3-930	15W	3000K	220x82	IP54	70°	90	-20...+45°C	100-277V	50/60	660g
P-DL-R190-15W-WV-G3-940	15W	4000K	220x82	IP54	70°	90	-20...+45°C	100-277V	50/60	660g
P-DL-R190-15W-WV-G3-965	15W	6500K	220x82	IP54	70°	90	-20...+45°C	100-277V	50/60	660g
P-DL-R190-18W-WV-G3-930	18W	3000K	220x82	IP54	70°	90	-20...+45°C	100-277V	50/60	660g
P-DL-R190-18W-WV-G3-940	18W	4000K	220x82	IP54	70°	90	-20...+45°C	100-277V	50/60	660g
P-DL-R190-18W-WV-G3-965	18W	6500K	220x82	IP54	70°	90	-20...+45°C	100-277V	50/60	660g



LEDVANCE

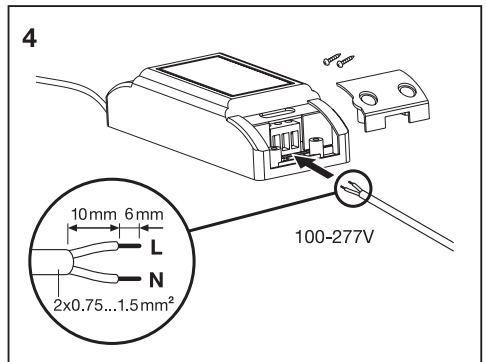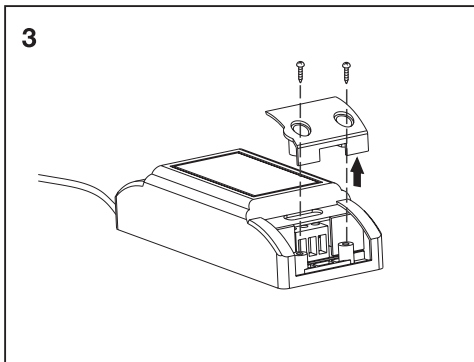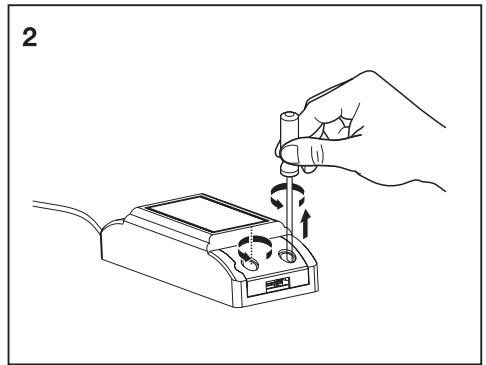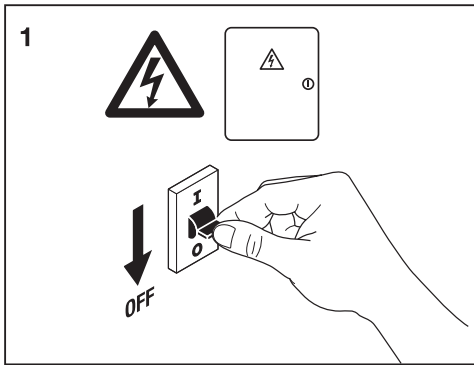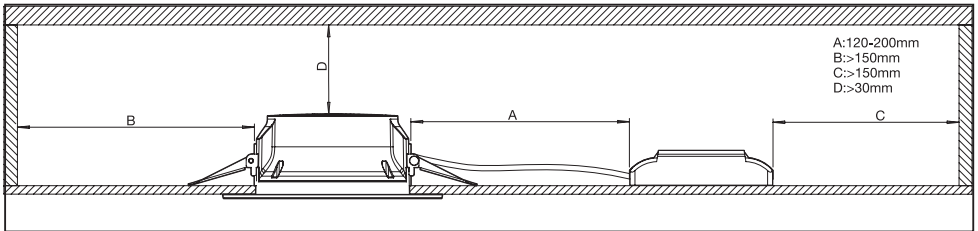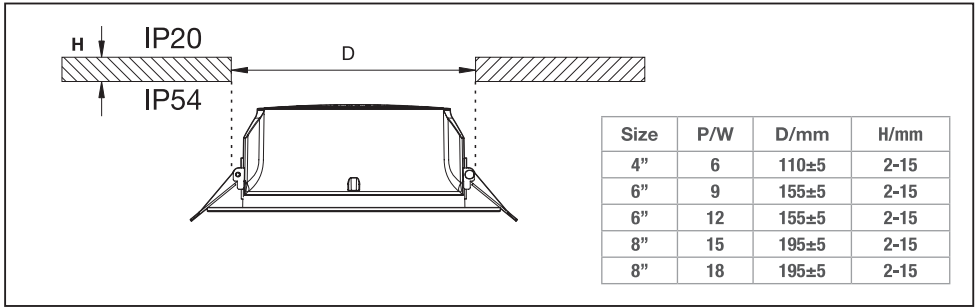

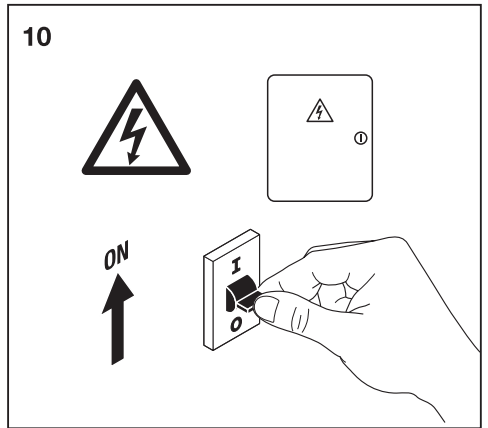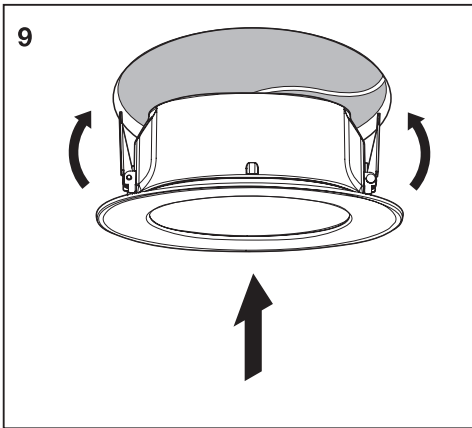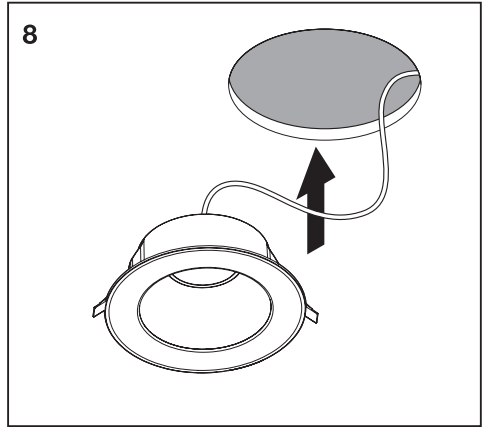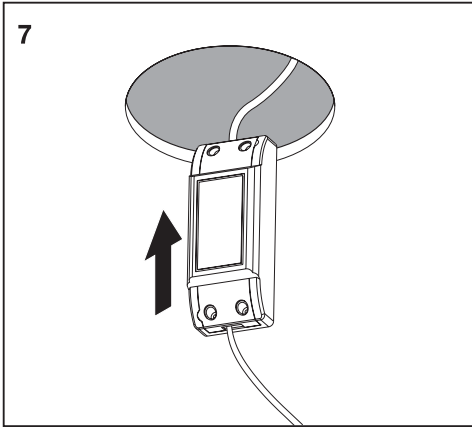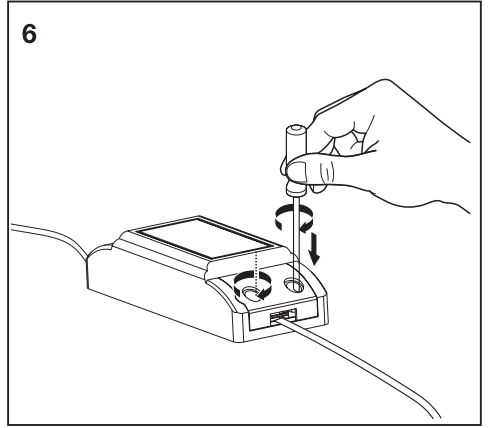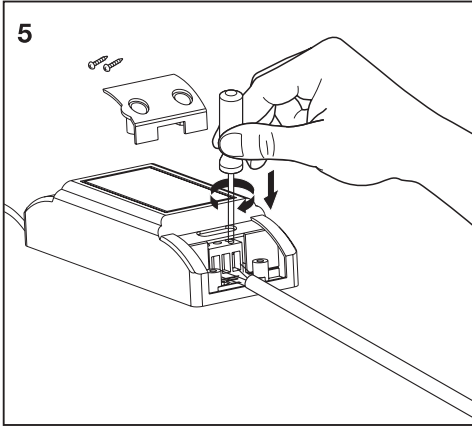

WARNING

- Connect to the power supply in accordance with national regulations.
- This product is designed for Indoor use only.
- This product is to be installed by a licensed electrician in strict accordance with local wiring rules.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from sags, surges and lighting strikes, additional surge protectors must be deployed on the primary side.
- This light source contained in this luminaire shall be only be replaced by the manufacturer or his service agent or a similar qualified person.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

تحذير

- قم بالتوصيل للتيار الكهربائي وفقاً للوائح الوطنية.
- تم تصميم هذا المنتج للاستخدام في الأماكن المغلقة فقط .
- هذا المنتج يجب أن يتم تثبيته من قبل كهربائي مرخص وفقاً لقواعد التوصيل المحلية.
- ملاحظة: وحدة الإضاءة هذه مزودة بحماية من نبضات الفولتية اللحظية المرتفعة حسب المواصفات المعتمدة عالمياً
- يجب استبدال مصدر الضوء الموجود في وحدة الإنارة فقط عن طريق المصنّع أو وكيل الخدمة أو شخص مؤهل مماثل
- إذا كان الكابل أو السلك الخارجي المرز لهذه الانارة تالفاً ، يجب استبداله بشكل حصري من قبل الشركة المصنعة أو وكيل الخدمة أو شخص مؤهل مماثل من أجل تجنب الخطر.



Caution,
risk of electric shock!

LEDVANCE Pte. Ltd.
320 Serangoon Road #14-02,
Centrium Square 218108, Singapore.
Phone +65 6911 8260

LEDVANCE Sdn. Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti,
46200 Petaling Jaya,
Selangor Darul Ehsan, Malaysia


LEDVANCE Pvt. Ltd.
1201-1202, 12th Floor, Signature Towers, Tower -A,
South City-I, Gurugram -122001, Haryana (India)
Consumer care (Name and address as per above),
Consumer care Tel. No. 0124-4150100
E-mail id: customercare@ledvance.com
www.ledvance.in

(주)레드밴스
서울시 강남구 삼성로554예성빌딩6층
(우편번호 06165)
전화번호: +82 80 489 1700
www.ledvance.co.kr

LEDVANCE Prosperity Co., Ltd.
20/F, Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

LEDVANCE MIDDLE EAST FZE
Office No. LB040123
PO Box 17476, Jebel Ali Free Zone
Dubai, United Arab Emirates
Tel.: +971 4 881 37 67
Fax: +971 4 881 37 69

LEDVANCE Pty Ltd
ABN 34 050 103 181
Unit 3, 83 Derby Street
Silverwater, NSW, 2128, Australia
Ph +61 29481 8399 / 1300 467 726
www.ledvance.com.au



Luminaires not suitable
for covering with thermally
insulating material.



RoHS



TIS.1955-2551

C10449057
G11160982
2023-01-19

www.ledvance.com