


LED VALUE FLOOD LIGHT

TRI CCT G4








Model	W	L x W x H (mm)	IP	Ta (°C)	Projected Area	Input Current	VAC	Hz	
V-FL-TRI-10W	10	120x123x33	65	-30 to +50°C	0.0089 m²	0.13A	100-240V	50/60 Hz	255g
V-FL-TRI-20W	20	146x143x33	65	-30 to +50°C	0.013 m²	0.25A	100-240V	50/60 Hz	335g
V-FL-TRI-30W	30	174x160x33	65	-30 to +50°C	0.108 m²	0.36A	100-240V	50/60 Hz	465g
V-FL-TRI-50W	50	220x200x33	65	-30 to +50°C	0.031 m²	0.6A	100-240V	50/60 Hz	750g
V-FL-TRI-60/80/100W	60/80/100	270x248x41	65	-30 to +50°C	0.049 m²	1.2A	100-240V	50/60 Hz	1380g
V-FL-TRI-120/135/150W	120/135/150	348x294x43	65	-30 to +50°C	0.078 m²	1.8A	100-240V	50/60 Hz	2100g
V-FL-TRI-160/180/200W	160/180/200	394x326x44	65	-30 to +50°C	0.098 m²	2.4A	100-240V	50/60 Hz	2670g

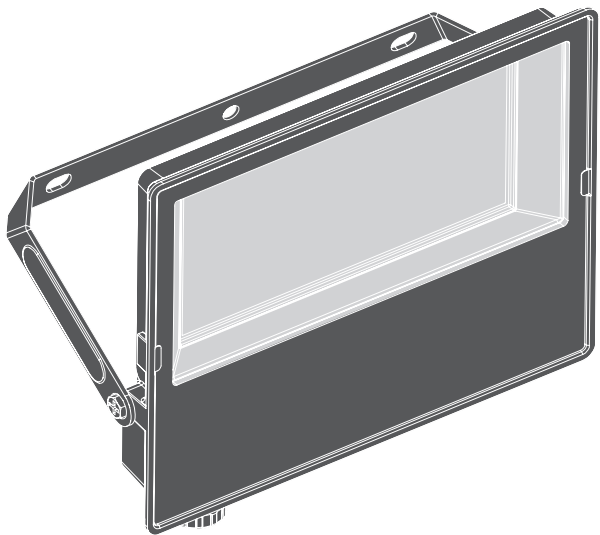









LEDVANCE




LED VALUE FLOOD LIGHT TRI CCT G4

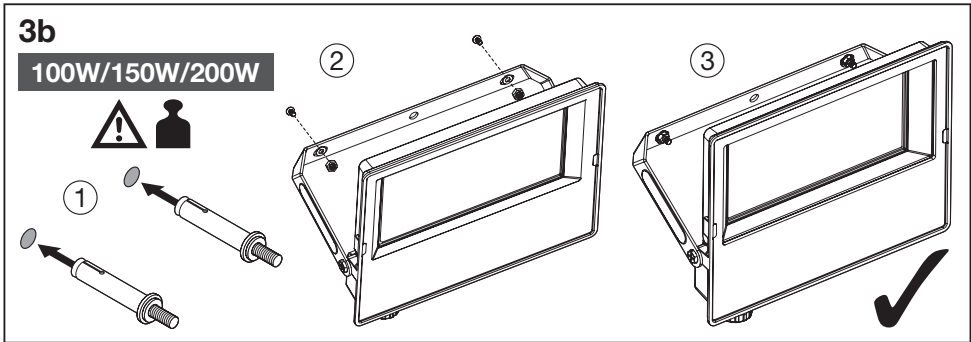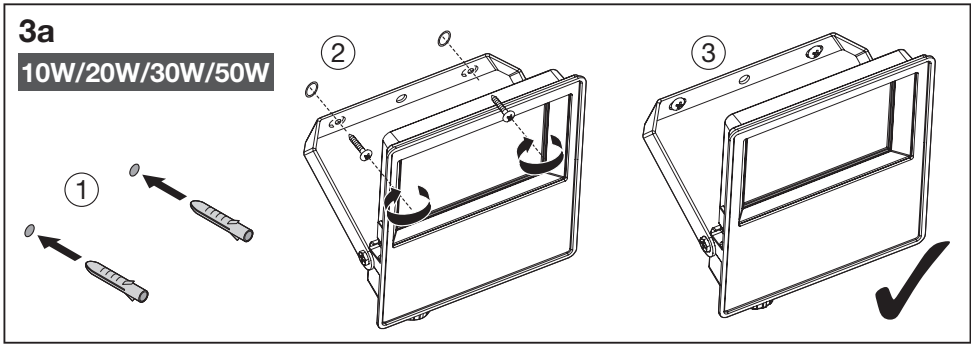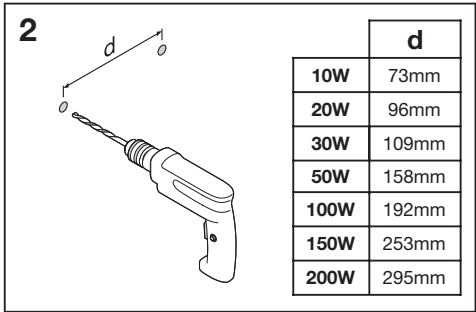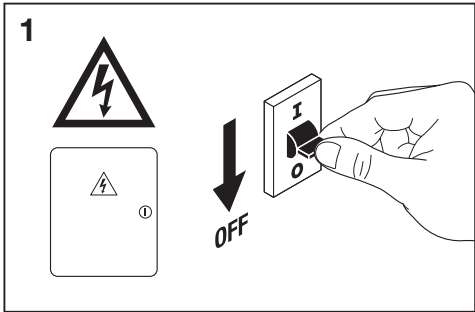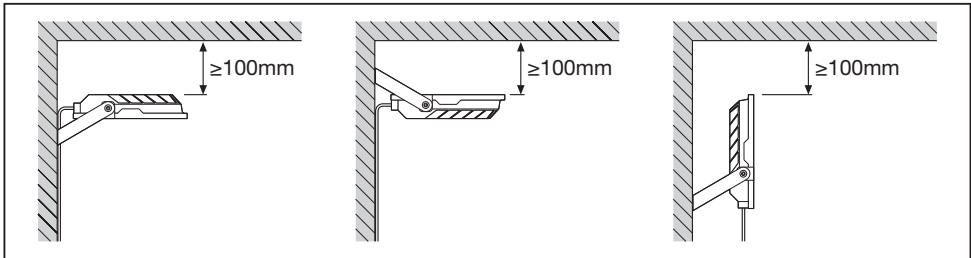

LED VALUE FLOOD LIGHT TRI CCT G4

					120VAac/230Vac		
	A	B	C				
10W	76	70	5.5	2*ST5	25	25	40
20W	97	94	5.5	2*ST5	16	16	25
30W	114	104	6.5	2*ST6	10	10	16
50W	164	152	6.5	2*ST6	8	8	12
100W	197	186	8.5	2*M8	5	4	8
150W	258	248	8.5	2*M8	3	3	5
200W	300	290	8.5	2*M8	2	2	3

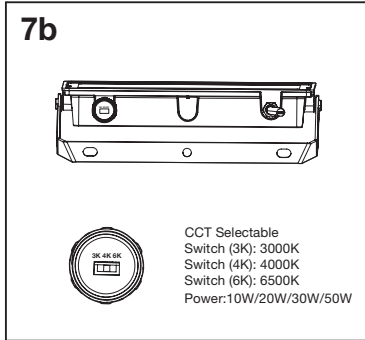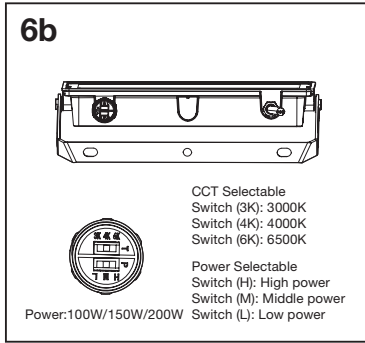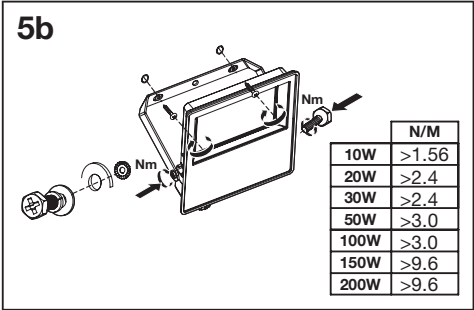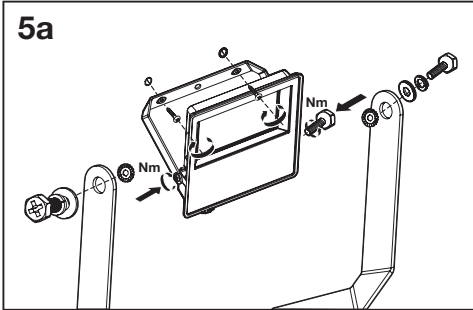

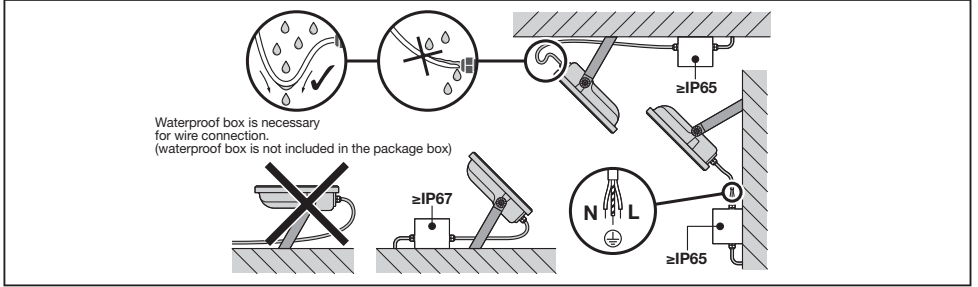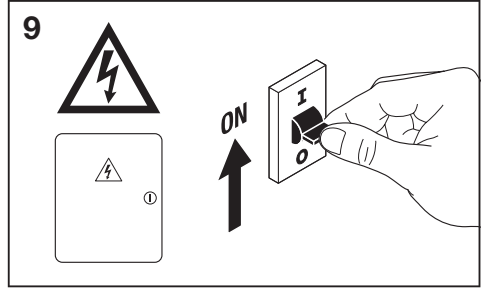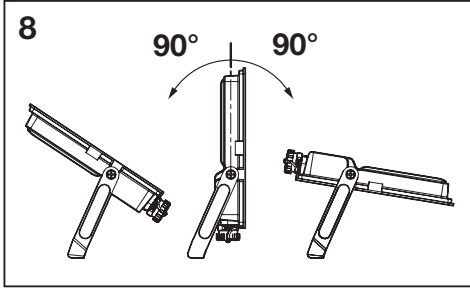

WARNING:

- The external flexible cord of this luminaire cannot be replaced. If the flexible cord is damage, the lamp should be scrapped.
- Do not touch the luminaire in operative status.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.
- Range mounting height 5m max.
- Only installed outside the arm's reach.
- Suitable for indoors and outdoors.
- Caution, risk of electric shock.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from sags, surges, and lightning strikes, additional surge protectors must be deployed on the primary side.
- Terminal block is not included. Installation may require advice from a qualified person.
- To reduce the risk of strangulation, the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

لا يتضمن الموصلات الطرفية لا يحتوي على كتلة المحطة الطرفية. التركيب قد يحتاج دعم من شخص ماهر

تحذير

- لا يمكن استبدال السلك المرن الخارجي لهذا الضوء. في حالة تلف السلك المرن، يجب تغيير المصباح بالكامل
- لا تلمس الكشاف في وضع التشغيل
- مصدر الضوء لمصباح الإضاءة غير قابل للاستبدال وعندما يصل إلى نهاية عمر وحدة الكشاف يجب استبداله بالكامل
- مستوى ارتفاع التثبيت 5 متر بحد أقصى
- تثبيت فقط بعيدا عن مستوى وصول الذراع
- مناسب للاستخدام الداخلي والخارجي
- ملاحظة: وحدة الإضاءة هذه مزودة بحماية من نبضات الفولتية اللحظية المرتفعة حسب المواصفات المعتمدة عالميا
- لا يتضمن الموصلات الطرفية. التركيب قد يحتاج دعم شخص ماهر
- لتقليل خطر الإختناق، يجب تثبيت الأسلاك المرننة المتصلة بوحدة الإنارة بشكل جيد و أمن على الحائط إذا كانت الأسلاك في متناول اليد.

LEDVANCE Pte. Ltd.
320 Serangoon Road #14-02,
Centrium Square 216108, Singapore.
Phone +65 6911 8260

LEDVANCE Sdn. Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti,
46200 Petaling Jaya,
Selangor Darul Ehsan, Malaysia

LEDVANCE Prosperity Co., Ltd.
20/F Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

LEDVANCE Private Limited
Unit #303, 3rd Floor, Servspaces 03,
Plot No. - D-5 & 6, Sector - 3, Noida,
Gautam Buddha Nagar - 201301
Uttar Pradesh (India)
Customer care (Name and address as per above)
Toll Free Number - 18001026258
E-mail id: customercare@ledvance.com

(주)레드밴스
서울시 강남구 삼성로 554 예성빌딩 6층
(우편번호 06168)
전화번호: +82 80 489 1700
www.ledvance.co.kr

LEDVANCE MIDDLE EAST FZE
Office No. LB04013
PO Box 17476, Jebel Ali Free Zone
Dubai, United Arab Emirates
Tel.: +971 4 881 37 67 | Fax: +971 4 881 37 69

LEDVANCE Pty Ltd
ABN 34 050 103 181
Unit 3, 83 Derby Street Silverwater,
NSW, 2128, Australia
Ph: +61 29481 8399/1300 467 726
www.ledvance.com.au

IP65 IK06

Standard:
IEC 60598-1, IEC 60598-2-5
IEC 61000-3-2



C10449057
G11220119
2025-01-02

www.ledvance.com

TIS 1955-2551