


LED VALUE DOWNLIGHT ALU G2




Size	Model Name	W	CCT	VAC	Hz	Ra	Ø x H	Ta	
4"	V-DL-ALU-R40-10W-G2-RF-TRI	10W	3000K/ 4000K/ 6500K Selectable	100-277V	50/60	>80	Ø113X60mm	-20...+50°C	156g
5"	V-DL-ALU-R50-15W-G2-RF-TRI	15W		100-277V	50/60	>80	Ø145X74mm	-20...+50°C	229g
6"	V-DL-ALU-R60-15/20W-G2-RF-TRI	15/20W		100-277V	50/60	>80	Ø174X87mm	-20...+50°C	330g
8"	V-DL-ALU-R80-26/35W-G2-RF-TRI	26/35W		100-277V	50/60	>80	Ø232X111.4mm	-20...+50°C	493g
4"	V-DL-ALU-R40-10W-G2-DF-TRI	10W		100-277V	50/60	>80	Ø113X49mm	-20...+50°C	131g
5"	V-DL-ALU-R50-15W-G2-DF-TRI	15W		100-277V	50/60	>80	Ø145X58mm	-20...+50°C	184g
6"	V-DL-ALU-R60-15/20W-G2-DF-TRI	15/20W		100-277V	50/60	>80	Ø174X65mm	-20...+50°C	262g
8"	V-DL-ALU-R80-26/35W-G2-DF-TRI	26/35W		100-277V	50/60	>80	Ø232X77mm	-20...+50°C	406g

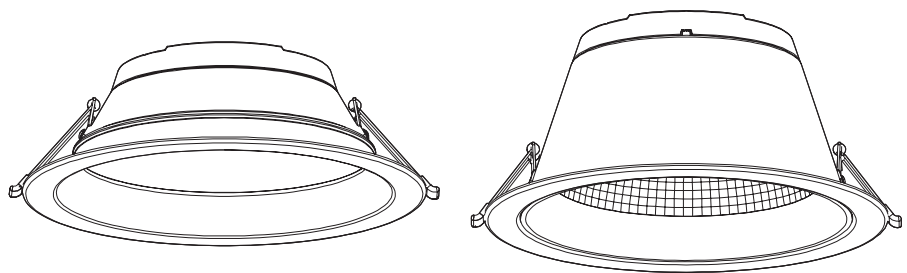


LEDVANCE

LED VALUE DOWNLIGHT ALU G2

Reflector version

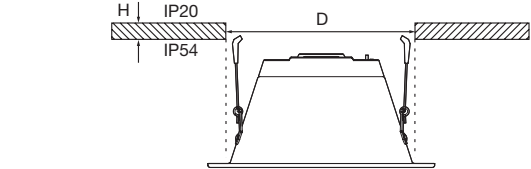


Size	Wattage	D(mm)	H(mm)
4"	10W	Φ90-100	8-30
5"	15W	Φ120-130	8-30
6"	15/20W	Φ145-155	8-30
8"	26/35W	Φ195-210	8-30

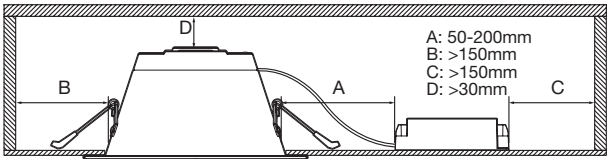


A: 50-200mm
B: >150mm
C: >150mm
D: >30mm

Diffusor version

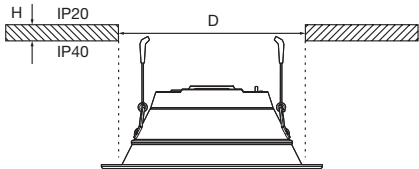


Size	Wattage	D(mm)	H(mm)
4"	10W	Φ90-100	8-30
5"	15W	Φ120-130	8-30
6"	15/20W	Φ145-155	8-30
8"	26/35W	Φ195-210	8-30

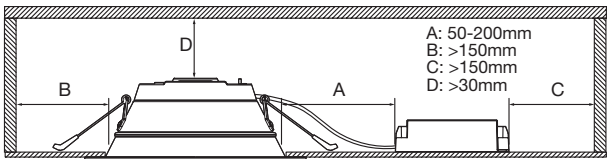






A: 50-200mm
B: >150mm
C: >150mm
D: >30mm

1

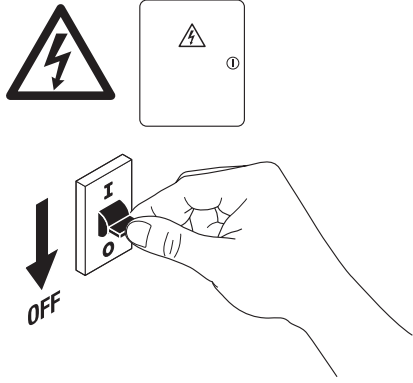

2

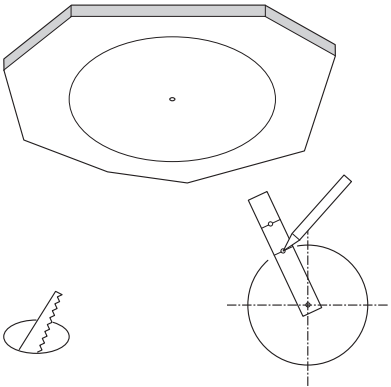

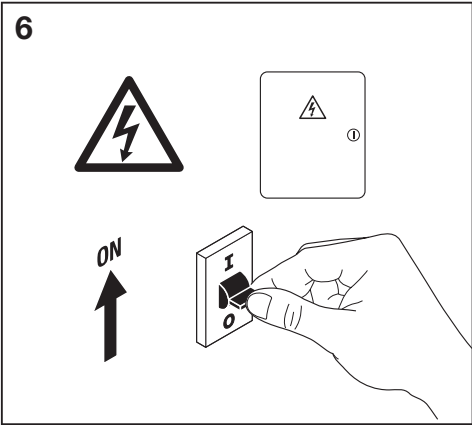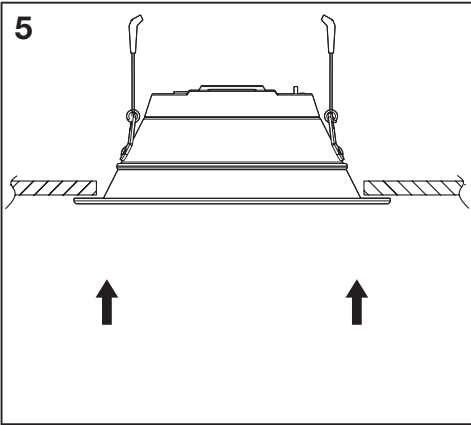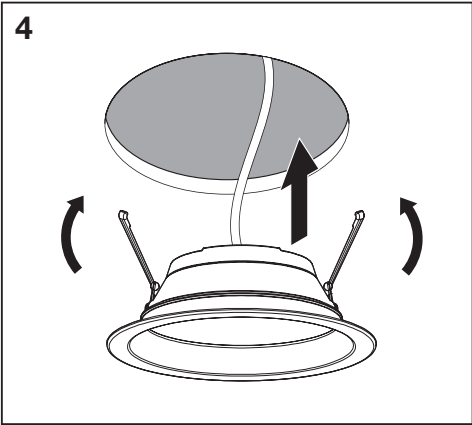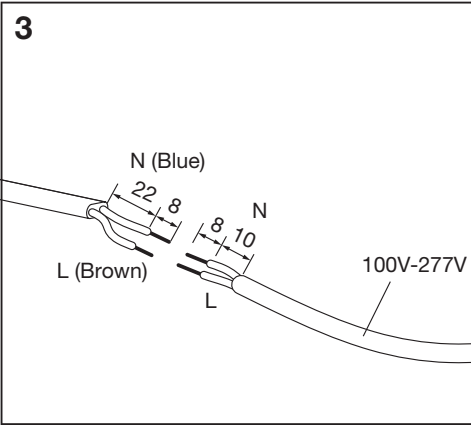

WARNING:

- Connect to the power supply in accordance with national regulations.
- This product is designed for Indoor use only.
- This product is to be installed by a licensed electrician in strict accordance with local wiring rules.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from sags, surges and lighting strikes, additional surge protectors must be deployed on the primary side.
- This light source contained in this luminaire shall be only be replaced by the manufacturer or his service agent or a similar qualified person.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- Terminal block not included. Installation must be performed by a qualified person.

تحذير

- قم بالتوصيل للتيار الكهربائي وفقا للوائح الوطنية.
- تم تصميم هذا المنتج للاستخدام في الأماكن المغلقة فقط.
- هذا المنتج يجب أن يتم تثبيته من قبل كهربائي مرخص وفقا لقواعد التوصيل المحلية.
- ملاحظة: وحدة الإضاءة هذه مزودة بحماية من نبضات الفولتية النحطية المرتفعة حسب المواصفات المعتمدة عالميا
- يجب استبدال مصدر الضوء الموجود في وحدة الإنارة فقط عن طريق المصنّع أو وكيل الخدمة أو شخص مؤهل مماثل
- إذا كان الكابل أو السلك الخارجي المرن لهذه الإنارة تالفا ، يجب استبداله بشكل حصري من قبل الشركة المصنعة أو وكيل الخدمة أو شخص مؤهل مماثل من أجل تجنب الخطر.



Caution,
risk of electric shock!

LEDVANCE Sdn. Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti,
46200 Petaling Jaya,
Selangor Darul Ehsan, Malaysia


LEDVANCE Pte. Ltd.
320 Serangoon Road #14-02,
Centrium Square 218108, Singapore.
Phone +65 6911 8260

(주)레드밴스
서울시 강남구 삼성로554예성빌딩6층
(우편번호 06165)
전화번호: +82 80 489 1700
www.ledvance.co.kr

LEDVANCE Prosperity Co., Ltd.
20/F, Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

LEDVANCE Pvt. Ltd.,
1201 – 1202, 12th Floor, Signature Towers, Tower – A,
South City –I, Gurugram – 122001, Haryana (India)
Consumer care cell (Name and address as per above),
Consumer care Tel.No. 0124-4150100
Toll Free Number – 18001026258
E-mail Id: customercare@ledvance.com
www.ledvance.in

LEDVANCE MIDDLE EAST FZE
Office No. LB040123
PO Box 17476, Jebel Ali Free Zone
Dubai, United Arab Emirates
Tel.: +971 4 881 37 67
Fax: +971 4 881 37 69



Luminaires not suitable
for covering with thermally
insulating material.

IP20 IP20
IP40 IP54



TIS 1955-2551

Standard
GB 7000.1
GB 7000.202
GB 17743

C10449057
G11194968
2024-05-08

www.ledvance.com