








LINEAR IndiviLED® THROUGH-WIRED



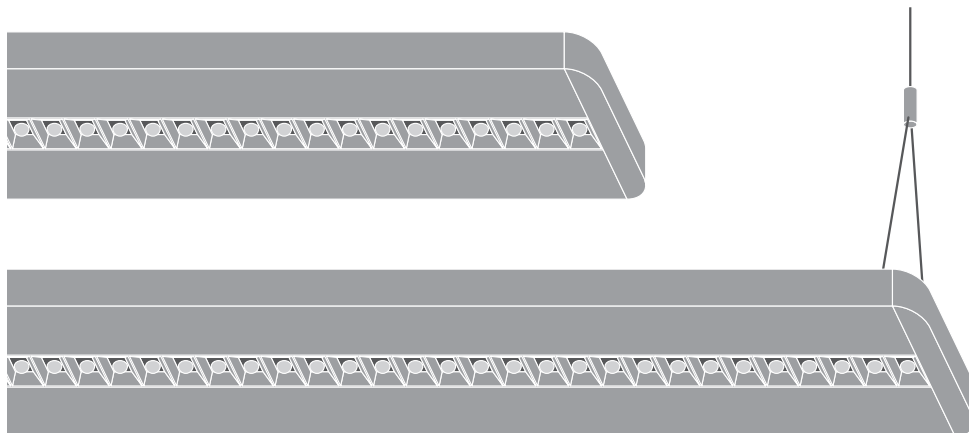








	EAN	l x w x h [mm]	W	lm	lm/W	K	IP	IK
LN INDV D 1200 34W/3000K TH	4058075109087	1199 x 120 x 40	34	3800	110	3000	20	06
LN INDV D 1200 34W/4000K TH	4058075109100	1199 x 120 x 40	34	4200	120	4000	20	06
LN INDV D 1500 25W/3000K TH	4058075109124	1488 x 120 x 40	25	3100	125	3000	20	06
LN INDV D 1500 25W/4000K TH	4058075109148	1488 x 120 x 40	25	3300	125	4000	20	06
LN INDV D 1500 48W/3000K TH	4058075109162	1488 x 120 x 40	48	5300	110	3000	20	06
LN INDV D 1500 48W/4000K TH	4058075109186	1488 x 120 x 40	48	5700	120	4000	20	06
LN INDV D/I 1200 42W/3000K TH	4058075109209	1199 x 120 x 40	42 (= 34 + 8)	4650 (= 3800 + 850)	110	3000	20	06
LN INDV D/I 1200 42W/4000K TH	4058075109223	1199 x 120 x 40	42 (= 34 + 8)	5050 (= 4200 + 850)	120	4000	20	06
LN INDV D/I 1500 56W/3000K TH	4058075109247	1488 x 120 x 40	56 (= 48 + 8)	6150 (= 5300 + 850)	110	3000	20	06
LN INDV D/I 1500 56W/4000K TH	4058075109261	1488 x 120 x 40	56 (= 48 + 8)	6550 (= 5700 + 850)	115	4000	20	06

	EAN	°C	V _{AC}	Hz	°	PF	R _a	kg
LN INDV D 1200 34W/3000K TH	4058075109087	-20...+45	220-240 V	50/60 Hz	70°	> 0.9	> 80	2.6 kg
LN INDV D 1200 34W/4000K TH	4058075109100	-20...+45	220-240 V	50/60 Hz	70°	> 0.9	> 80	2.6 kg
LN INDV D 1500 25W/3000K TH	4058075109124	-20...+45	220-240 V	50/60 Hz	70°	> 0.9	> 80	3.1 kg
LN INDV D 1500 25W/4000K TH	4058075109148	-20...+45	220-240 V	50/60 Hz	70°	> 0.9	> 80	3.1 kg
LN INDV D 1500 48W/3000K TH	4058075109162	-20...+45	220-240 V	50/60 Hz	70°	> 0.9	> 80	3.3 kg
LN INDV D 1500 48W/4000K TH	4058075109186	-20...+45	220-240 V	50/60 Hz	70°	> 0.9	> 80	3.3 kg
LN INDV D/I 1200 42W/3000K TH	4058075109209	-20...+45	220-240 V	50/60 Hz	70° + 120°	> 0.9	> 80	2.8 kg
LN INDV D/I 1200 42W/4000K TH	4058075109223	-20...+45	220-240 V	50/60 Hz	70° + 120°	> 0.9	> 80	2.8 kg
LN INDV D/I 1500 56W/3000K TH	4058075109247	-20...+45	220-240 V	50/60 Hz	70° + 120°	> 0.9	> 80	3.4 kg
LN INDV D/I 1500 56W/4000K TH	4058075109261	-20...+45	220-240 V	50/60 Hz	70° + 120°	> 0.9	> 80	3.4 kg

LINEAR IndiviLED® DIRECT

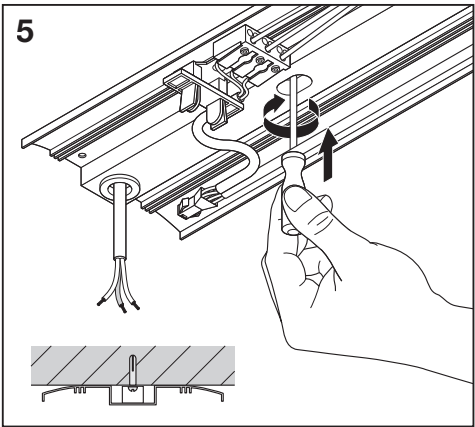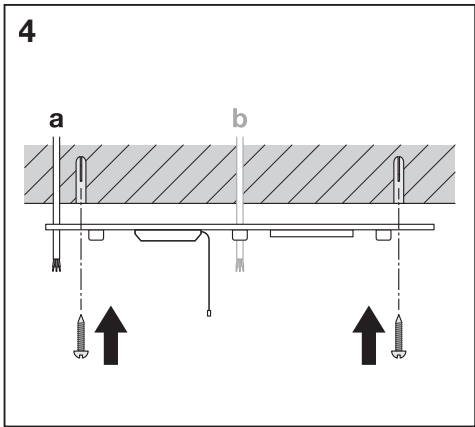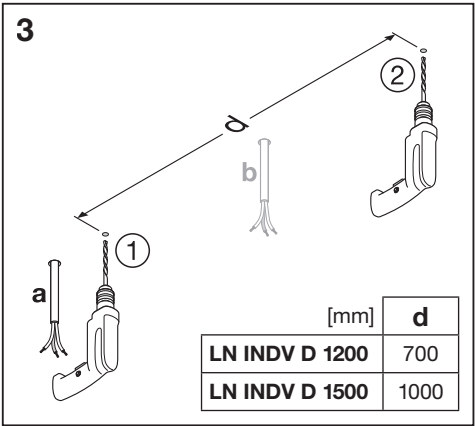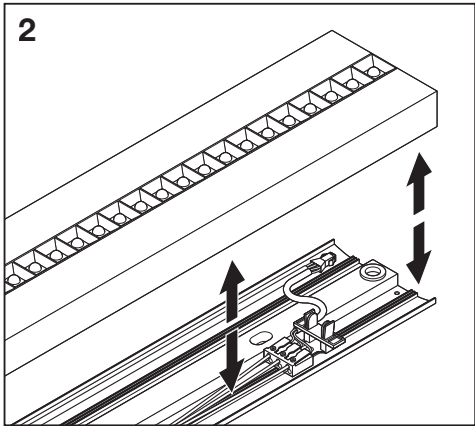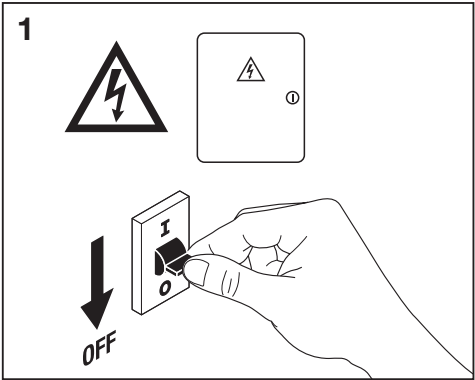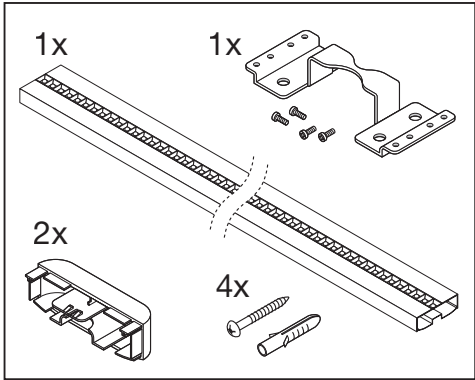


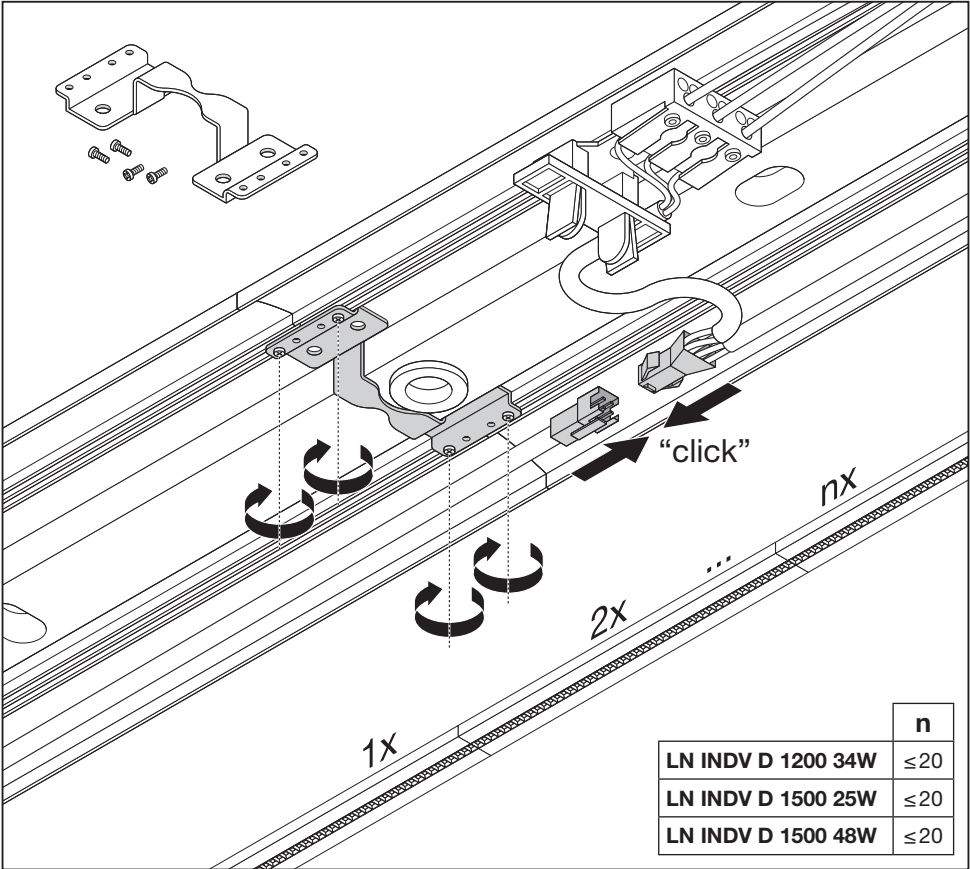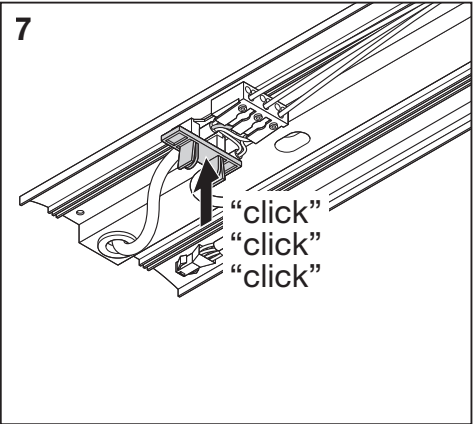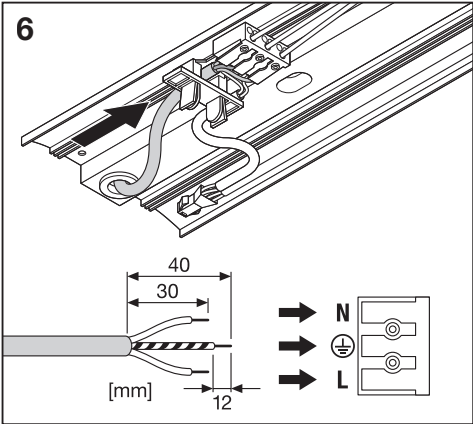

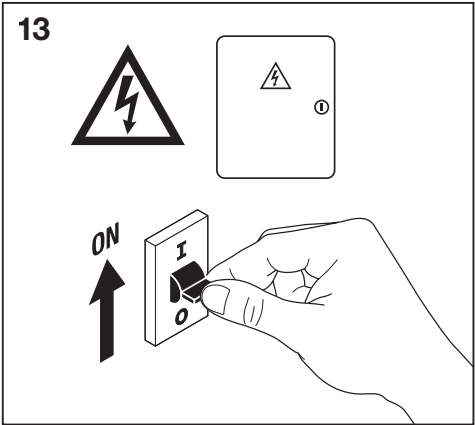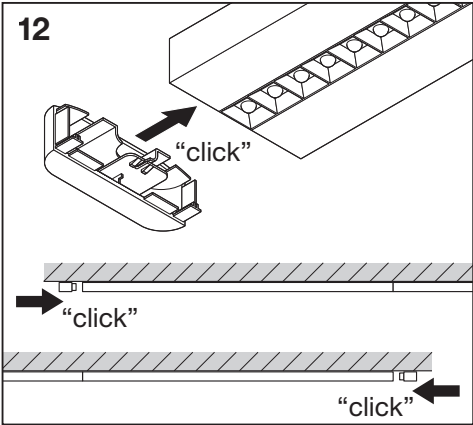
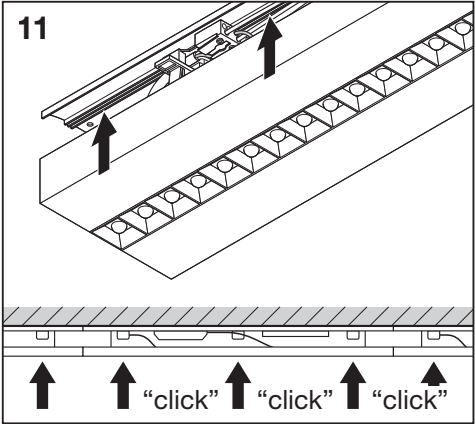
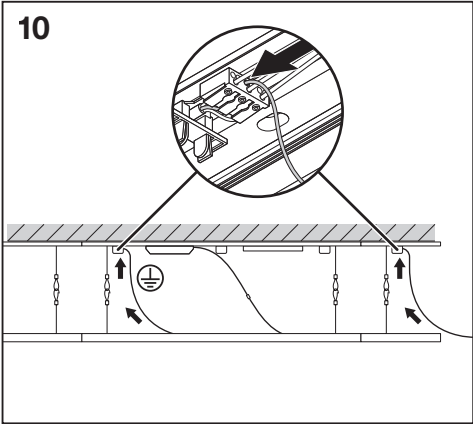
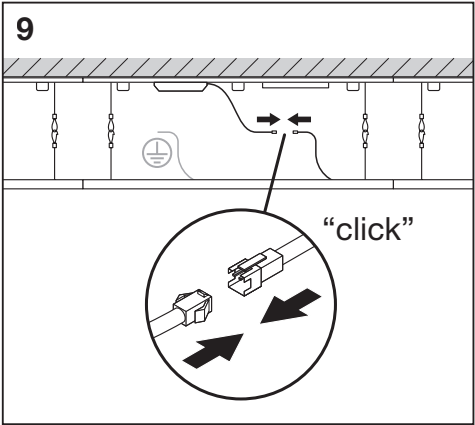
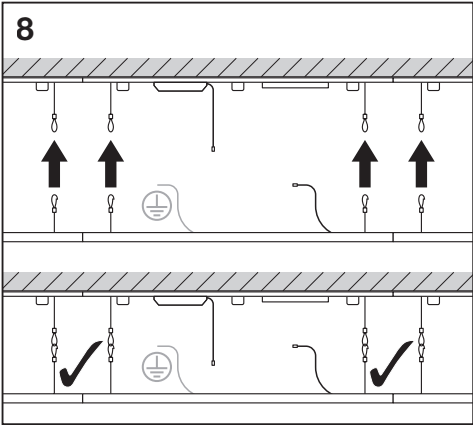



LINEAR IndiviLED® DIRECT | DIRECT/INDIRECT




LN INDV SUSPENSION KIT
EAN 4058075133280






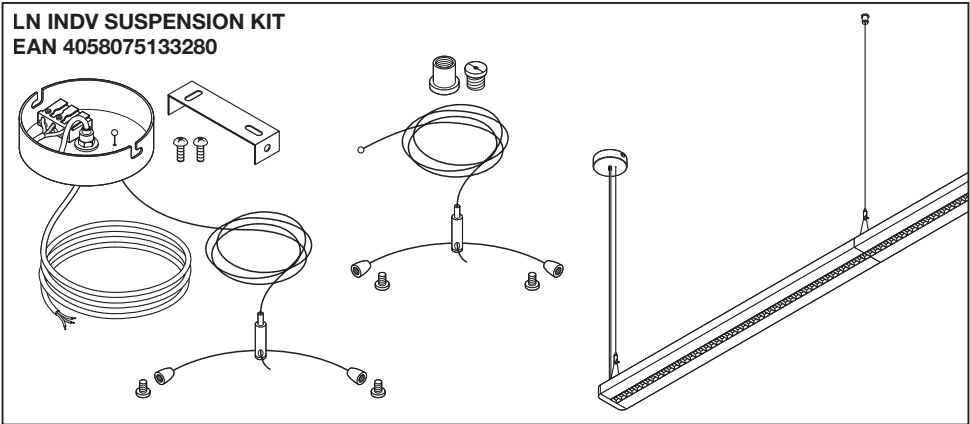


LN INDV
SUSPENSION WIRE
EAN 4058075133327

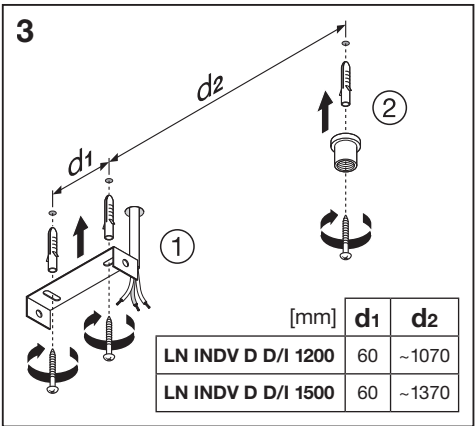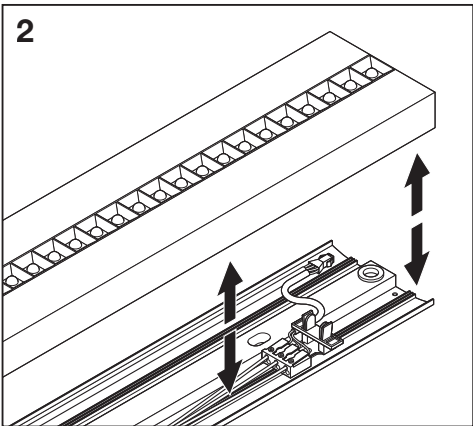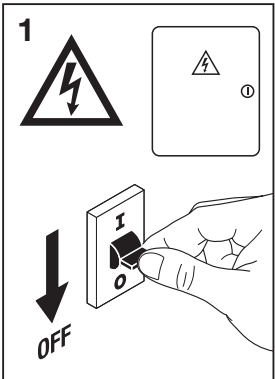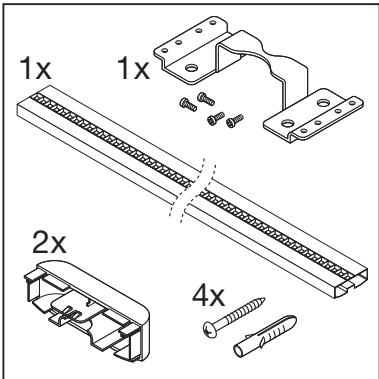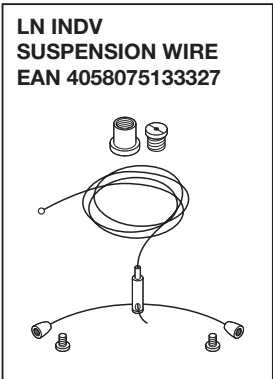

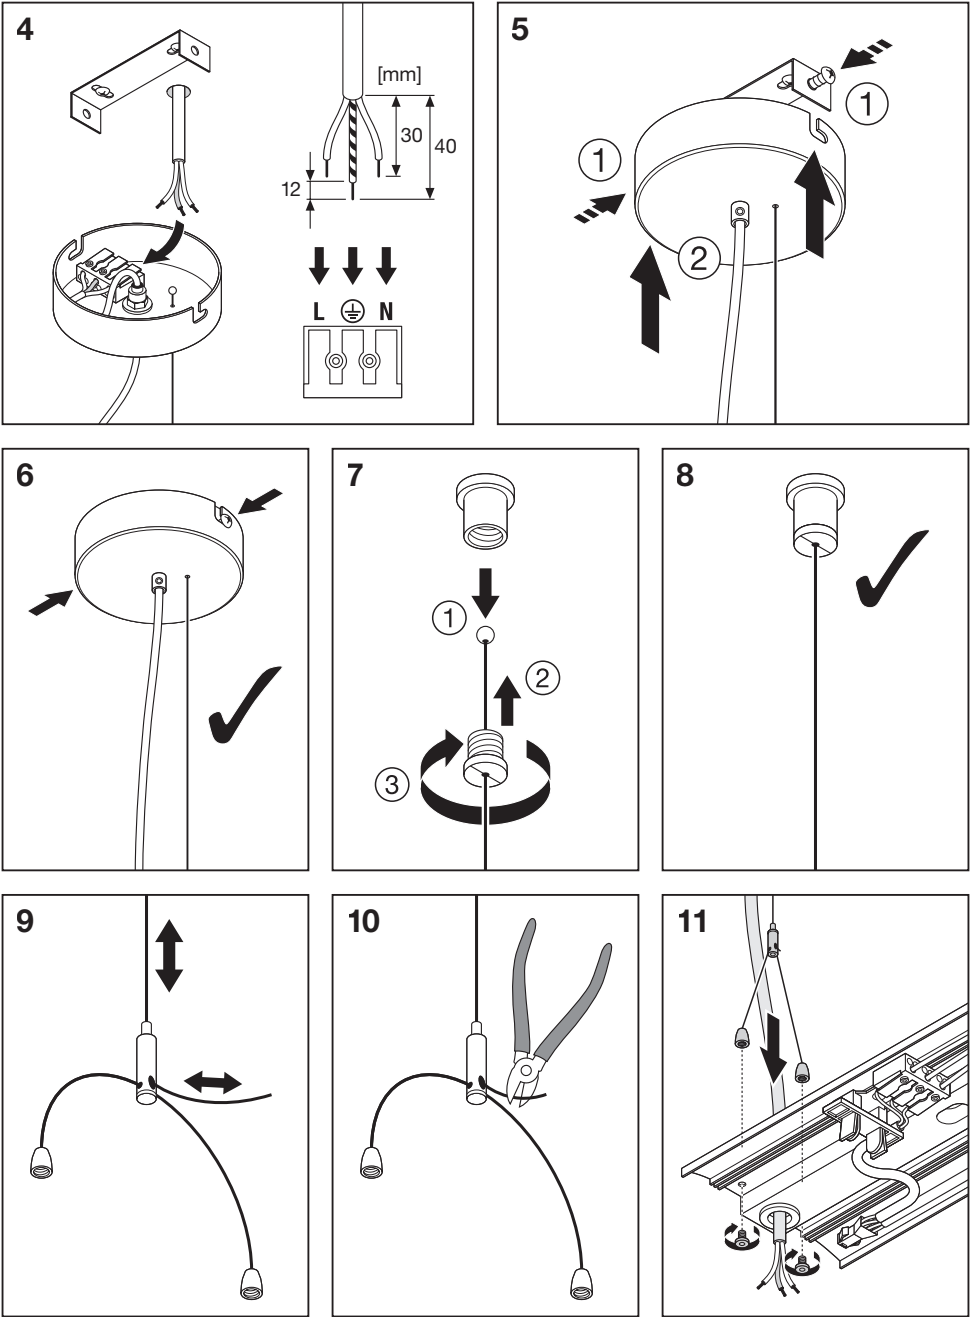

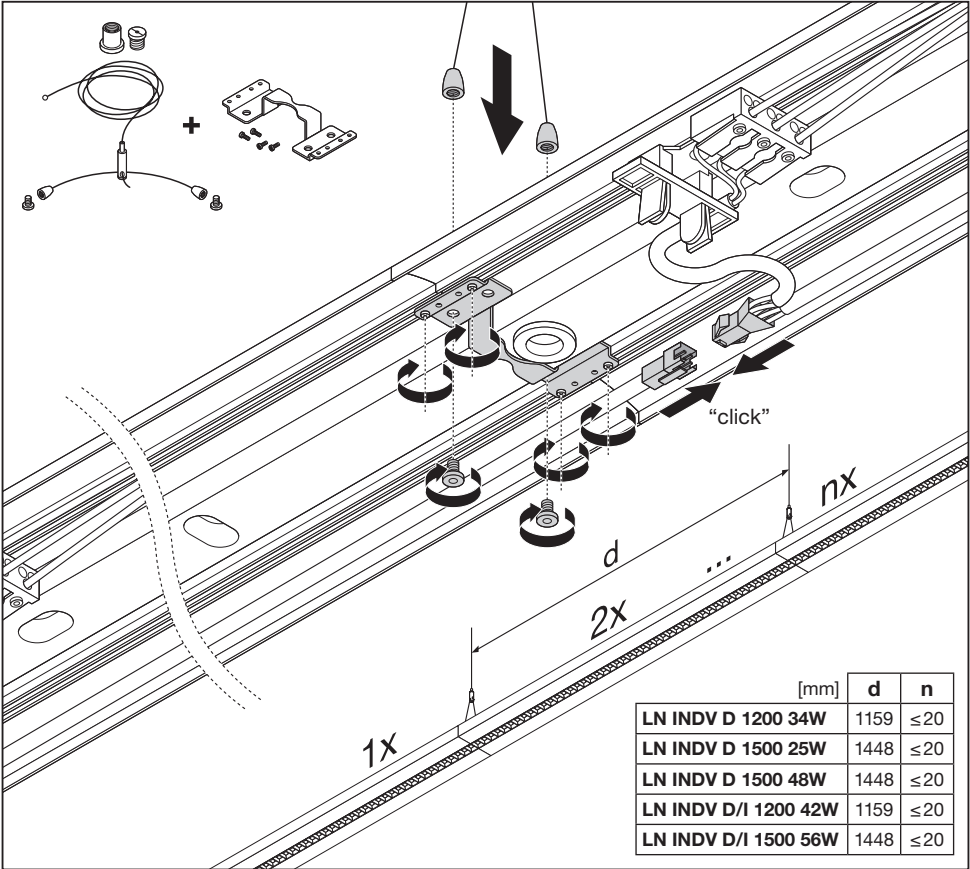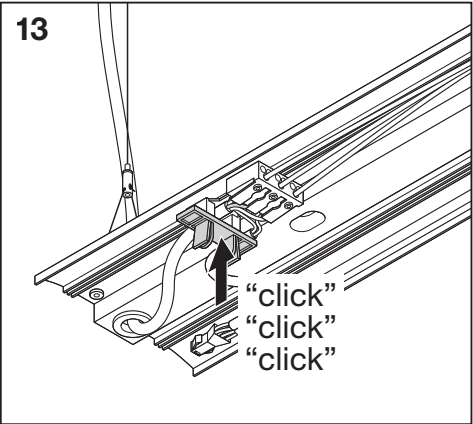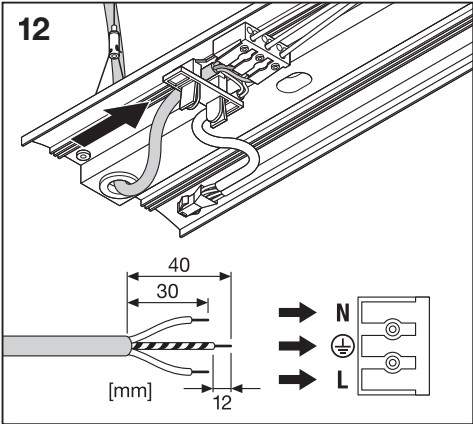

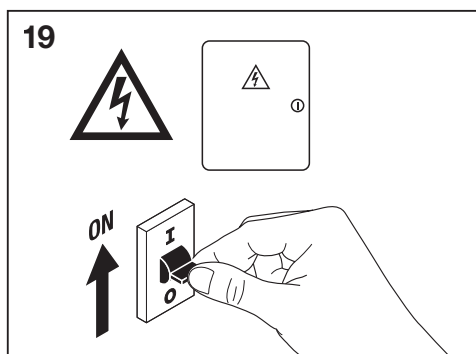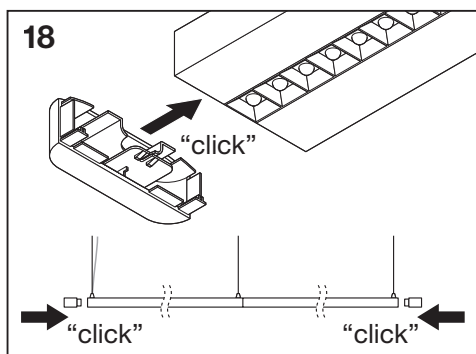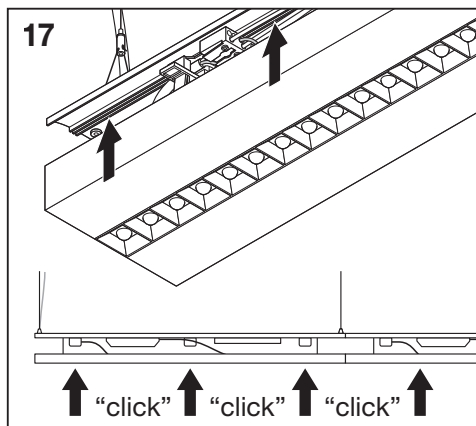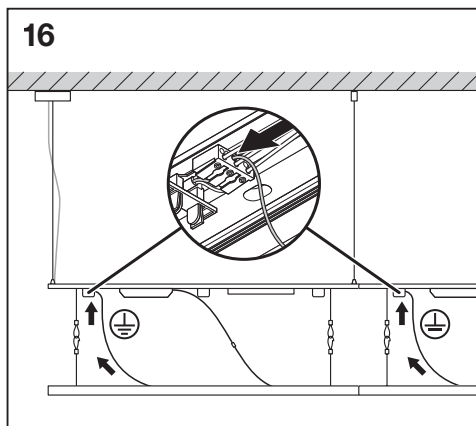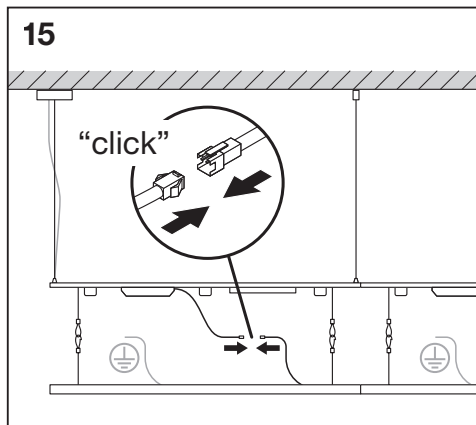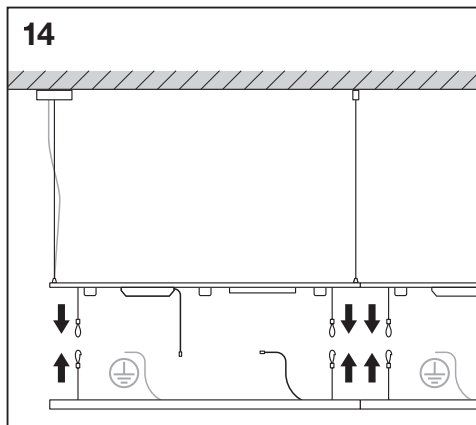

CE   EAC RoHS



C10449058
G11041352
29.06.18



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com