

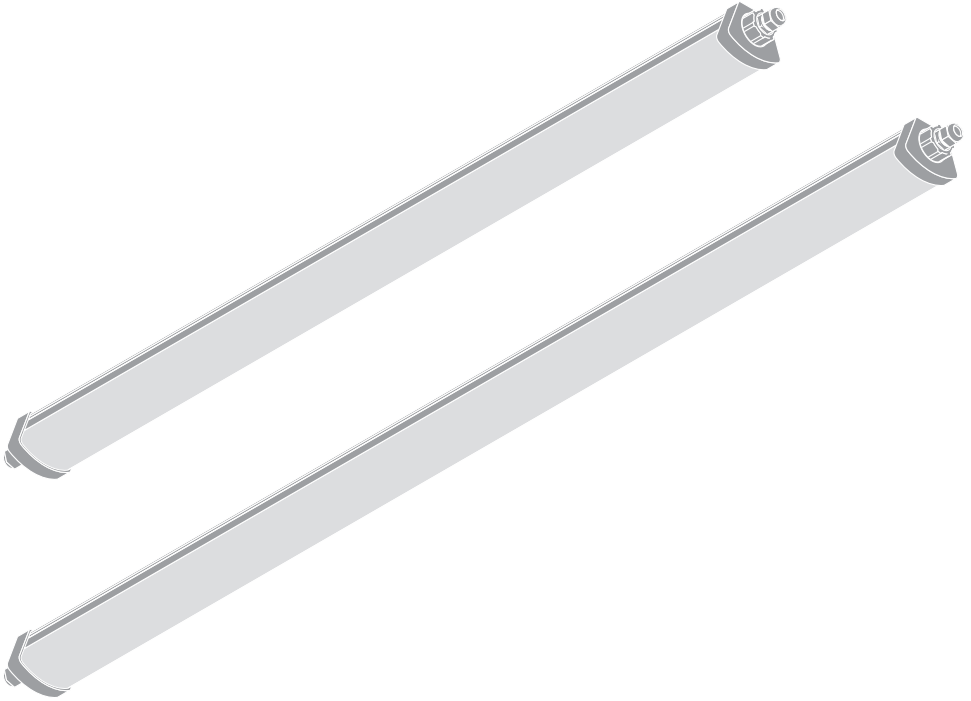
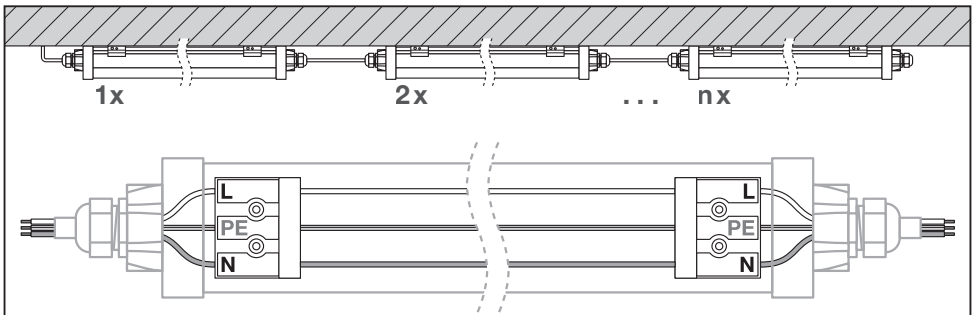
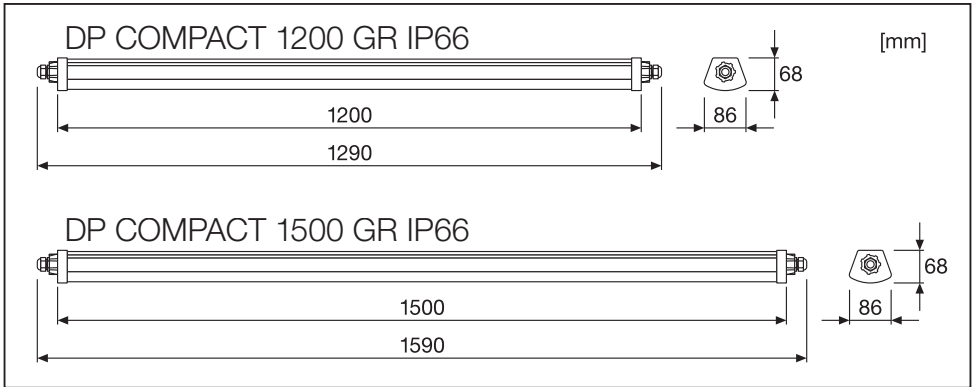


DAMPPROOF COMPACT IP66







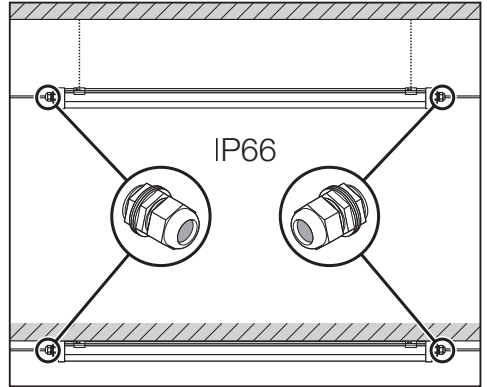








	EAN	l x w x h [mm]	W	lm	lm/W	K	IP	IK
DP COMPACT 1200 23W/4000K GR IP66	4058075210028	1290x86x68	23	2800	120	4000K	66	08
DP COMPACT 1200 44W/4000K GR IP66	4058075210042	1290x86x68	44	5400	120	4000K	66	08
DP COMPACT 1200 44W/6500K GR IP66	4058075210066	1290x86x68	44	5400	120	6500K	66	08
DP COMPACT 1500 31W/4000K GR IP66	4058075210080	1590x86x68	31	3800	120	4000K	66	08
DP COMPACT 1500 55W/4000K GR IP66	4058075210103	1590x86x68	55	6700	120	4000K	66	08
DP COMPACT 1500 55W/6500K GR IP66	4058075210127	1590x86x68	55	6700	120	6500K	66	08

	EAN	⊖ (°C)	V _{AC}	Hz	∇	PF	R _a	👤
DP COMPACT 1200 23W/4000K GR IP66	4058075210028	-35...+50	220-240V	50/60Hz	120°	≥ 0.9	≥ 80	1.1 kg
DP COMPACT 1200 44W/4000K GR IP66	4058075210042	-35...+50	220-240V	50/60Hz	120°	≥ 0.9	≥ 80	1.2 kg
DP COMPACT 1200 44W/6500K GR IP66	4058075210066	-35...+50	220-240V	50/60Hz	120°	≥ 0.9	≥ 80	1.2 kg
DP COMPACT 1500 31W/4000K GR IP66	4058075210080	-35...+50	220-240V	50/60Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 55W/4000K GR IP66	4058075210103	-35...+50	220-240V	50/60Hz	120°	≥ 0.9	≥ 80	1.4 kg
DP COMPACT 1500 55W/6500K GR IP66	4058075210127	-35...+50	220-240V	50/60Hz	120°	≥ 0.9	≥ 80	1.4 kg

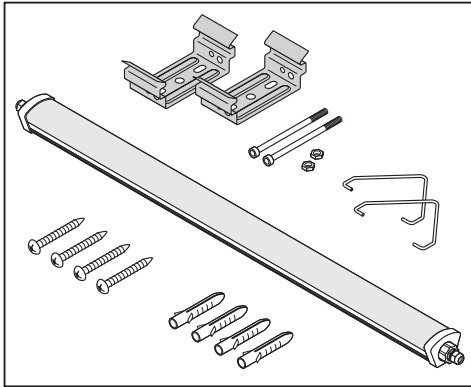

n	B10	B16	C10	C16
DP COMPACT 1200 GR IP66	20	20	20	20
DP COMPACT 1500 GR IP66	16	16	16	16

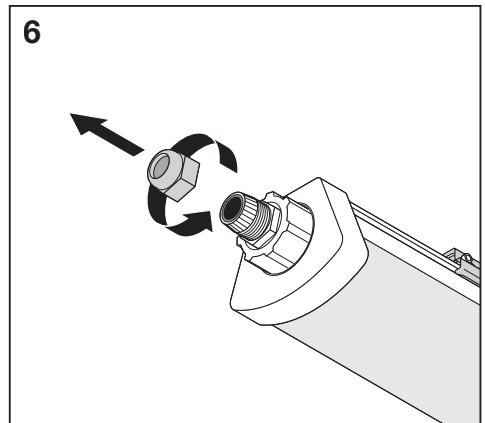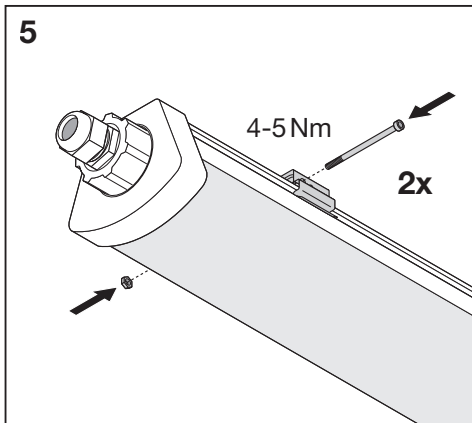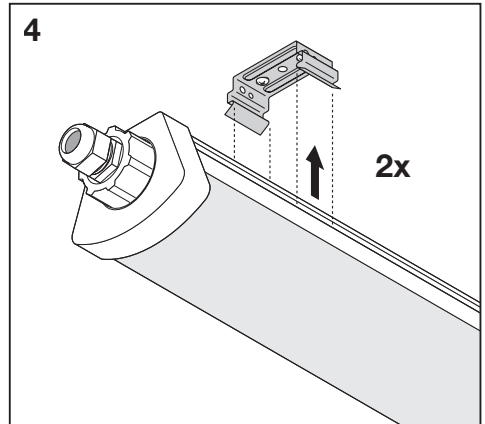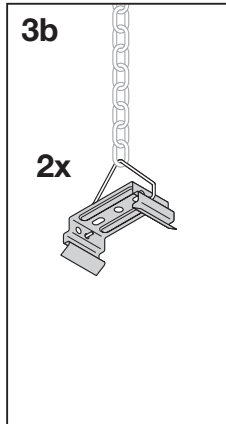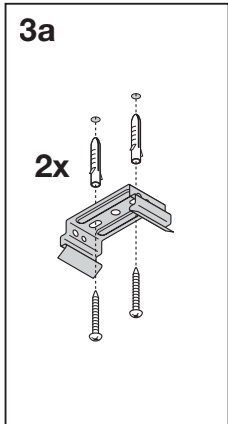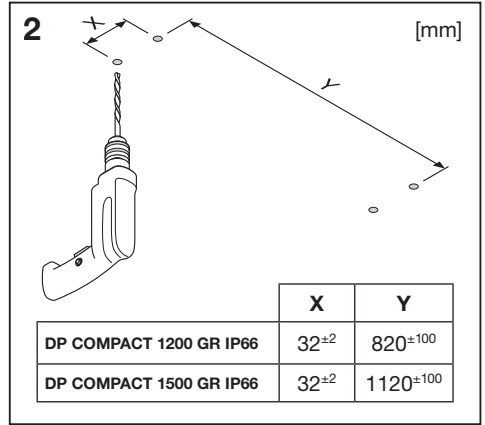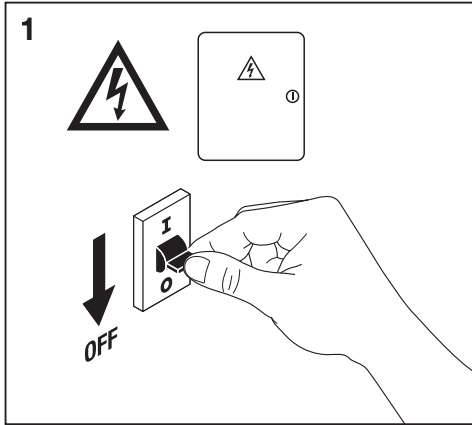

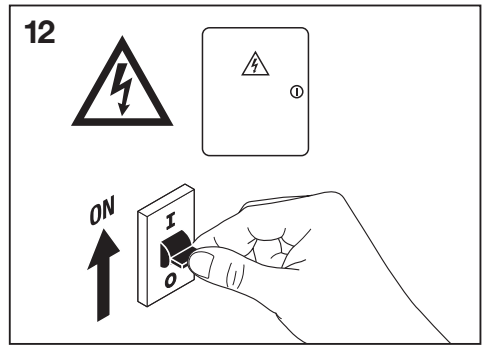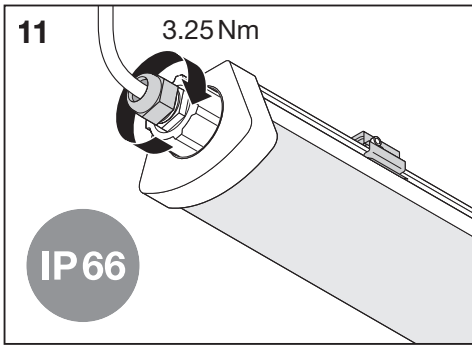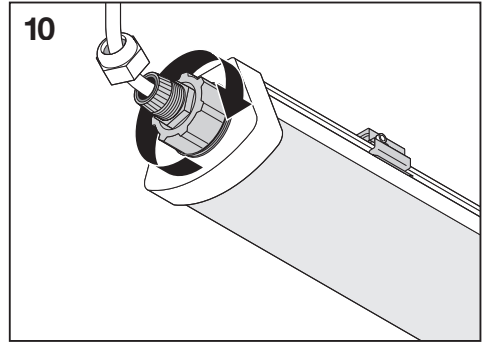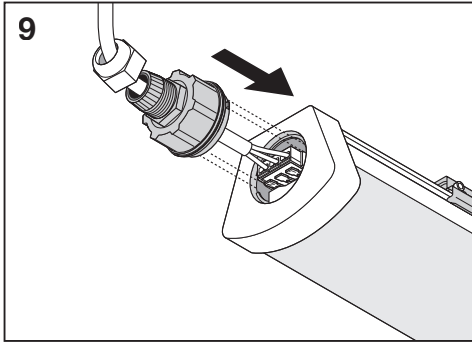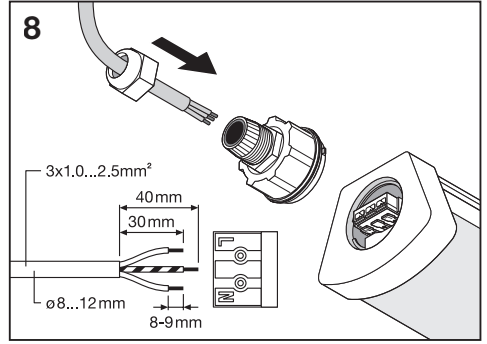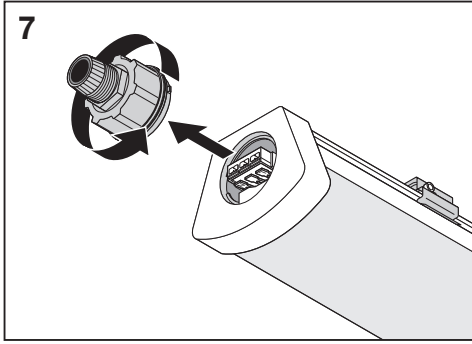

CE EAC   061  RoHS



C10449057
G11062621
10.12.18



LEDVANCE GmbH
Steinerne Furt 62
86167 Augsburg, Germany
www.ledvance.com