




LED PERFORMANCE DOWNLIGHT G2







داون لایت






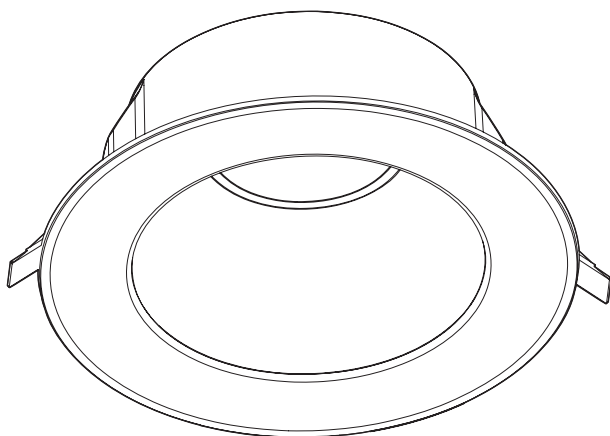


| MODEL | W | K | Ø x H (mm) | IP (exposed part) |  | Ra | Ta (°C) | VAC | Hz |  |
|---------------------|----|------|------------|-------------------|---|----|----------|-----------|-------|---|
| LDPFM-DL2-RD04-AM | 8 | 3000 | 132x50 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 260g |
| LDPFM-DL2-RD04-AM | 8 | 4000 | 132x50 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 260g |
| LDPFM-DL2-RD04-AM | 8 | 6500 | 132x50 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 260g |
| LDPFM-DL2-RD06-AM | 11 | 3000 | 180x65 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 410g |
| LDPFM-DL2-RD06-AM | 11 | 4000 | 180x65 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 410g |
| LDPFM-DL2-RD06-AM | 11 | 6500 | 180x65 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 410g |
| LDPFM-DL2-RD06HO-AM | 14 | 3000 | 180x65 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 410g |
| LDPFM-DL2-RD06HO-AM | 14 | 4000 | 180x65 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 410g |
| LDPFM-DL2-RD06HO-AM | 14 | 6500 | 180x65 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 410g |
| LDPFM-DL2-RD08-AM | 17 | 3000 | 220x82 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 660g |
| LDPFM-DL2-RD08-AM | 17 | 4000 | 220x82 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 660g |
| LDPFM-DL2-RD08-AM | 17 | 6500 | 220x82 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 660g |
| LDPFM-DL2-RD08HO-AM | 21 | 3000 | 220x82 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 660g |
| LDPFM-DL2-RD08HO-AM | 21 | 4000 | 220x82 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 660g |
| LDPFM-DL2-RD08HO-AM | 21 | 6500 | 220x82 | IP54 | 65° | 80 | -20~45°C | 220V-240V | 50/60 | 660g |



LEDVANCE

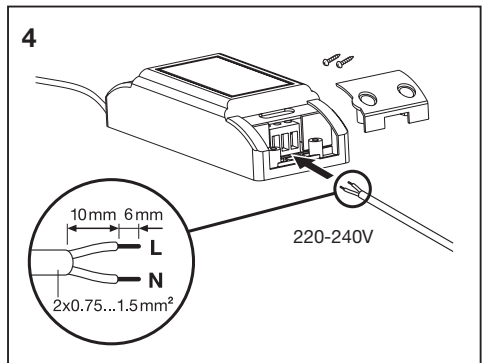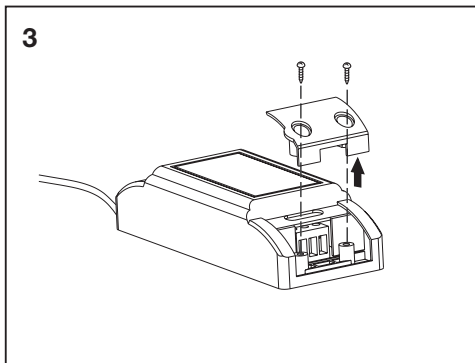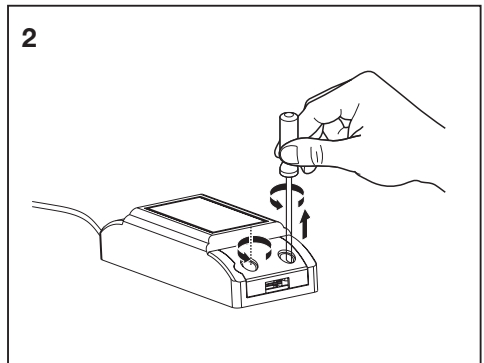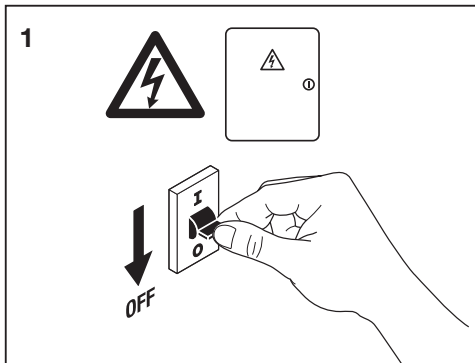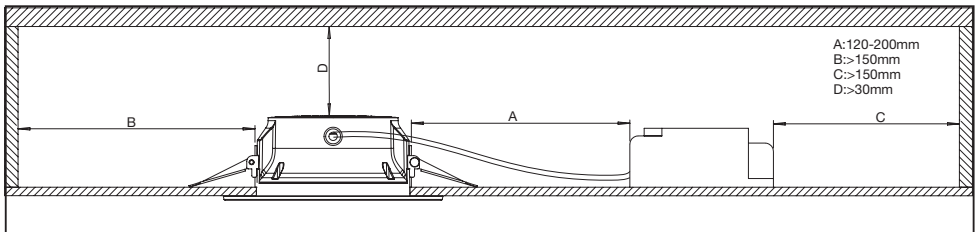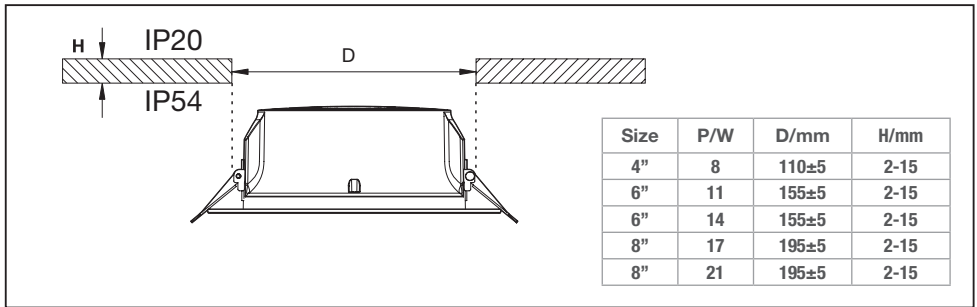

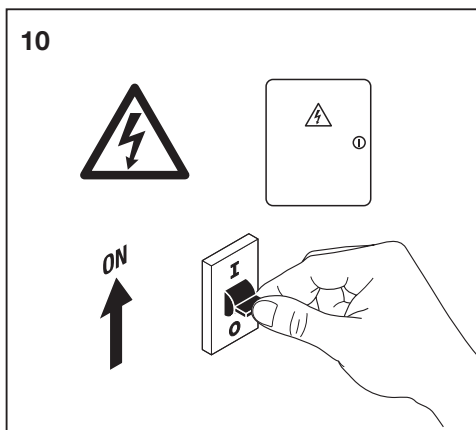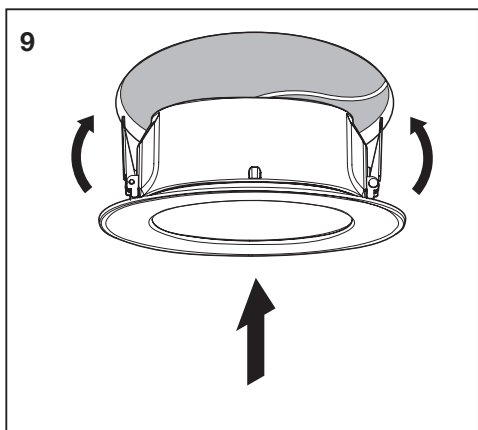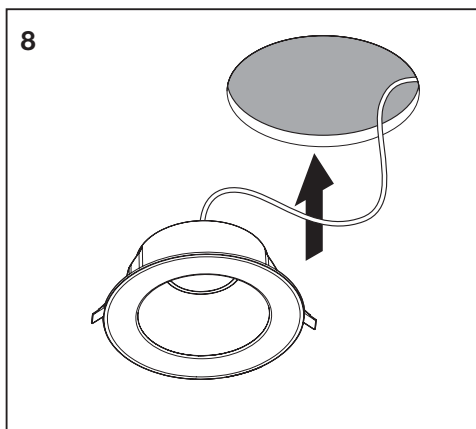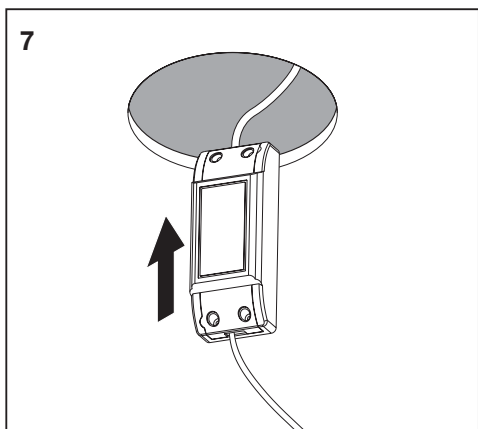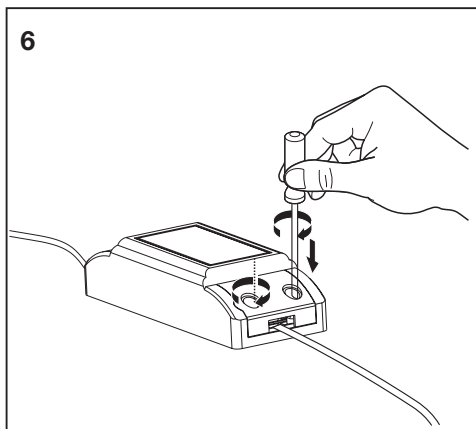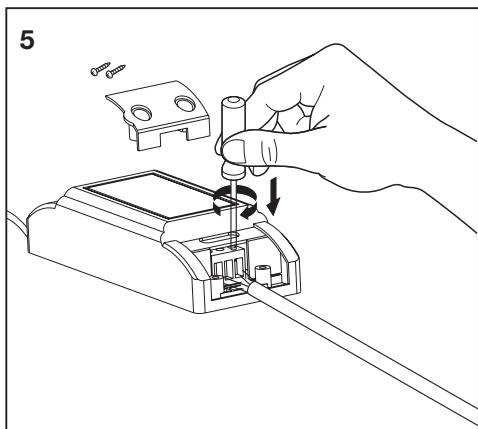

WARNING

- Connect to the power supply in accordance with national regulations.
- This product is designed for Indoor use only.
- This product is to be installed by a licensed electrician in strict accordance with local wiring rules.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from sags, surges and lighting strikes, additional surge protectors must be deployed on the primary side.
- This light source contained in this luminaire shall be only be replaced by the manufacturer or his service agent or a similar qualified person.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

تحذير

- قم بالتوصيل للتيار الكهربائي وفقا للوائح الوطنية.
- تم تصميم هذا المنتج للاستخدام في الأماكن المغلقة فقط .
- هذا المنتج يجب أن يتم تثبيته من قبل كهربائي مرخص وفقا لقواعد التوصيل المحلية.
- ملاحظة: وحدة الإضاءة هذه مزودة بحماية من نبضات الفولتية النحطية المرتفعة حسب المواصفات المعتمدة عالميا
- يجب استبدال مصدر الضوء الموجود في وحدة الإنارة فقط، عن طريق المصنّع أو وكيل الخدمة أو شخص مؤهل مماثل
- إذا كان الكابل أو السلك الخارجي المرن لهذه الانارة تالفا ، يجب استبداله بشكل حصري من قبل الشركة المصنعة أو وكيل الخدمة أو شخص مؤهل مماثل من أجل تجنب الخطر.



Caution,
risk of electric shock!

☎ LEDVANCE Lighting Co., Ltd.
No. 1-1 Industrial Road (North),
Chancheng District,
Foshan, Guangdong, P.R.C
Postal Code: 528000
www.ledvance.com.cn

☎ LEDVANCE Sdn. Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti,
46200 Petaling Jaya,
Selangor Darul Ehsan, Malaysia


☎ (주)레드밴스
서울시 강남구 삼성로 554 예성빌딩 6층
(우편번호 06165)
전화번호: +82 80 4891 700
www.ledvance.co.kr

☎ LEDVANCE Pte Ltd.
988 Toa Payoh North, # 03-06,
Singapore 319002

☎ LEDVANCE Pvt. Ltd.
1201-1202, 12th Floor, Signature Towers, Tower-A,
South City - I, Gurugram - 122001, Haryana (India)
Consumer care (Name and address as per above),
Consumer care Tel. No. 0124-4150100
E-mail id: customercare@ledvance.com
www.ledvance.in

☎ LEDVANCE Prosperity Co. Ltd.
Room 4007-4009 Office Tower,
Convention Plaza, 1 Harbour Road,
Wanchai, Hong Kong

☎ LEDVANCE Middle East FZE
Jebel Ali Free Zone
JAFZA 16, Office 603
P.O. Box 17476, Dubai – UAE



Luminaires not suitable
for covering with thermally
insulating material.



TIS.1955-2551

Standard
GB 7000.1
GB 7000.202
GB 17743

C10449057

G11083357
2019-08-16

www.ledvance.com