


# PRODUCT DATASHEET

LED VALUE PANEL BACKLIT G2 0606 | Recessed panel luminaires

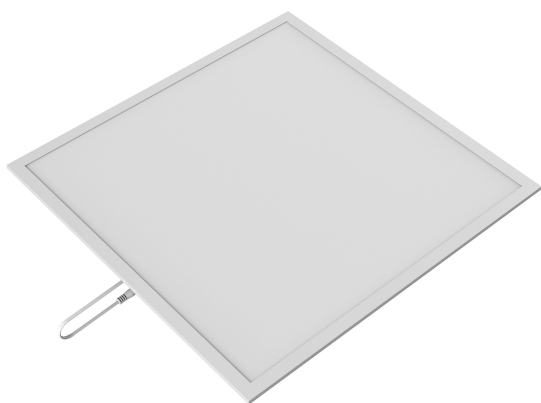

---

## Product benefits

- Value for money luminaire
- Low flicker light thanks to special electronic control gear
- External driver for extended flexibility and easy installation
- Versions with DALI ECG available

## TECHNICAL DATA

### Electrical data

Nominal wattage	33.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Protection class	II

### Photometrical data

Luminous flux	3680 lm
Luminous efficacy	110 lm/W
Color temperature	3000 K
Color rendering index Ra	> 80
Standard deviation of color matching	5 sdc <sub>m</sub>
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °

### Dimensions & Weight

Length	595.00 mm
Width	595.00 mm
Height	32.00 mm
Product weight	1745.00 g

LDV PL0606B UGR DALI

### Materials & Colors

Body material	Steel
Mercury content	0.0 mg

### Application & Mounting

Type of protection	IP54/IP20
Dimmable	Yes
Type of dimming	DALI2
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
LED module replaceable	Not replaceable

## Lifespan

Lifespan L70/B50 at 25 °C	50000 h <sup>1)</sup>
---------------------------	-----------------------

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Certificates & Standards

Standards	CE / RoHS
-----------	-----------

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854032370	Folding box 1	648 mm x 605 mm x 37 mm	2676.00 g	14.51 dm <sup>3</sup>
4099854032387	Shipping box 6	695 mm x 237 mm x 659 mm	17056.00 g	108.55 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.