




# PRODUCT DATASHEET

LED VALUE PANEL BACKLIT G2 0312 | Recessed panel luminaires

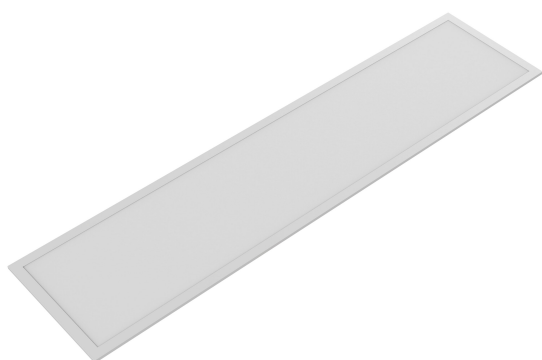

---

## Product benefits

- Value for money luminaire
- Low flicker light thanks to special electronic control gear
- External driver for extended flexibility and easy installation
- Versions with DALI ECG available

## TECHNICAL DATA

### Electrical data

Nominal wattage	33.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Protection class	II

### Photometrical data

Luminous flux	3680 lm
Luminous efficacy	110 lm/W
Color temperature	3000 K
Color rendering index Ra	> 80
Standard deviation of color matching	5 sdc <sub>m</sub>
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °

### Dimensions & Weight

Length	1195.00 mm
Width	295.00 mm
Height	32.00 mm
Product weight	1755.00 g

LDV PL0312B UGR DALI

### Materials & Colors

Body material	Steel
Mercury content	0.0 mg

### Application & Mounting

Type of protection	IP40/IP20
Dimmable	Yes
Type of dimming	DALI2
Mounting type	Recessed/Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor

### Lifespan

Lifespan L70/B50 at 25 °C	50000 h <sup>1)</sup>
---------------------------	-----------------------

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Certificates & Standards

Standards	CE / RoHS
Replaceable light source (EPREL)	Not replaceable

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854032479	Folding box 1	1,248 mm x 305 mm x 42 mm	2417.00 g	15.99 dm <sup>3</sup>
4099854032486	Shipping box 6	1,295 mm x 267 mm x 357 mm	15710.00 g	123.44 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.