




PRODUCT DATASHEET

LED VALUE PANEL BACKLIT G2 0312 | Recessed panel luminaires

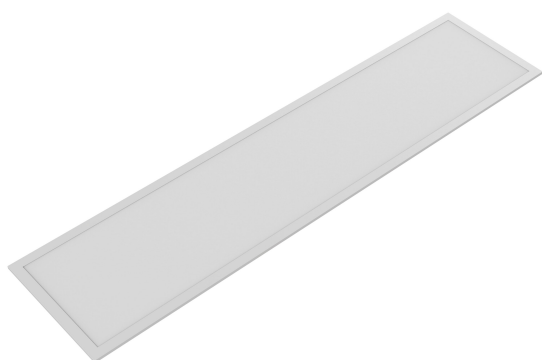

Product benefits

- Value for money luminaire
- Low flicker light thanks to special electronic control gear
- External driver for extended flexibility and easy installation
- Versions with DALI ECG available

TECHNICAL DATA

Electrical data

Nominal wattage	33.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Protection class	II

Photometrical data

Luminous flux	3680 ... 4000 lm
Luminous efficacy	111 lm/W
Color temperature	3000...6500 K
Color rendering index Ra	> 80
Beam angle	120 °

Dimensions & Weight

Length	1195.00 mm
Width	295.00 mm
Height	32.00 mm
Product weight	1540.00 g

LDVAL PL0312B TRI

Materials & Colors

Body material	Steel
Mercury content	0.0 mg

Application & Mounting

Type of protection	IP40
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Application environment	Indoor
LED module replaceable	Not replaceable

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854270246	Folding box 1	1,241 mm x 38 mm x 303 mm	1837.00 g	14.29 dm ³
4099854270253	Shipping box 6	1,300 mm x 292 mm x 370 mm	12502.00 g	140.45 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.