


# PRODUCT DATASHEET

LED VALUE PANEL BACKLIT G2 0612 | Recessed panel luminaires

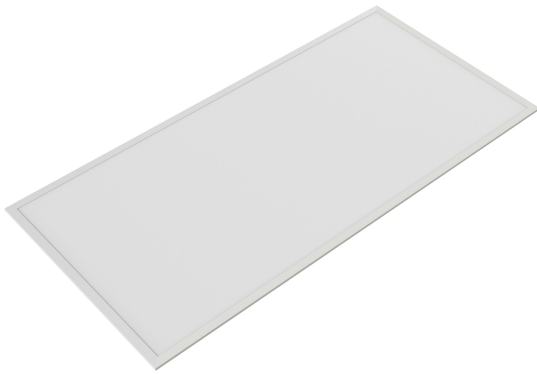

---

## Product benefits

- Value for money luminaire
- Low flicker light thanks to special electronic control gear
- External driver for extended flexibility and easy installation
- Versions with DALI ECG available

TECHNICAL DATA

Electrical data

Nominal wattage	49.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Protection class	II

Photometrical data

Luminous flux	5380 ... 5850 lm
Luminous efficacy	109 lm/W
Color temperature	3000...6500 K
Color rendering index Ra	> 80
Beam angle	120 °

Dimensions & Weight

Length	1195.00 mm
Width	595.00 mm
Height	34.00 mm
Product weight	3195.00 g

LDVAL PL0312B TRI



LDVAL PL0612B TRI

Materials & Colors

Body material	Steel
Mercury content	0.0 mg

Application & Mounting

Type of protection	IP40
Dimmable	No
Mounting type	Recessed/Suspended/Surface
Application environment	Indoor
Replaceable light source	No

Certificates & Standards

Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854270260	Folding box 1	1,251 mm x 42 mm x 603 mm	3762.00 g	31.68 dm <sup>3</sup>
4099854270277	Shipping box 4	1,310 mm x 230 mm x 670 mm	16903.00 g	201.87 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.