

PRODUCT DATASHEET

ENDURA Flood Solar

ENDURA® FLOOD Solar Sensor | Solar-powered flood luminaire with motion and light sensor

Areas of application

- Outdoor



Product benefits

- Economical with a high light output
- Eco-friendly solar powered light
- More programable setting with PIR remote control
- Multiple adjustments of sensor range, daylight detection and hold time
- Automatically switches on and off according to available daylight thanks to photocell light sensor

Product features

- Efficient LED floodlight with high light output
- Solar powered outdoor LED luminaire
- Flexible motion and daylight sensor



TECHNICAL DATA

Electrical data


Nominal wattage	10.00 W
Nominal voltage	3,6 V
Nominal current	2700.000 mA
Protection class	III
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	1200 lm
Total luminous flux of contained light sources	1200 lm
Luminous efficacy	120 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	80
Standard deviation of color matching	< 6 sdc _m
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG1
Beam angle	95 °

Dimensions & Weight

Length	194.00 mm
Width	67.00 mm
Height	313.00 mm
Product weight	1730.00 g

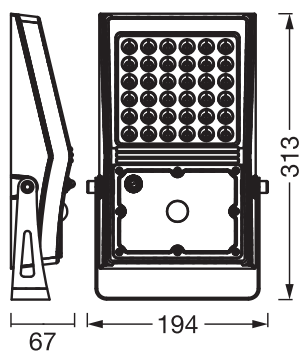

ENDURA FLOOD SOLAR SEN REM
10W

Materials & Colors

Product color	Black
Housing color	Black
Body material	Metal
Cover material	Glass
Glow Wire Test according to IEC 60695-2-12	650 °C

Application & Mounting

Ambient temperature range	-20...+45 °C
Temperature range at storage	-20...+60 °C
Type of protection	IP65/IP65
Protection class IK (shock resistance)	IK04
Dimmable	No
Mounting type	Surface
Application environment	Outdoor
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	36000 h ¹⁾
Number of switching cycles	36000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Sensor

Type of sensor	Motion / Daylight
Sensor technology	Passive infrared (PIR)
Sensor detection angle	95 °

BATTERY

Type of Battery	Lithium ion battery Li metal button cell battery
Battery size [GMS]	Others
Nominal voltage of battery	3.2 V
Battery charging time	5 h

Emergency lighting

Type of emergency operation test	None
----------------------------------	------

Certificates & Standards

Standards	CE
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

EQUIPMENT / ACCESSORIES

- Remote control included

Safety advice

- If the battery compartment (if applicable) does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- Please avoid: Maximal ambient temperature: +35 °C. Replacement of a battery with an incorrect type that can defeat safeguard (for example, in the case of some lithium battery types). Altitude during operation: 2000 m. Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	ENDURA FLOOD SOLAR SEN REM
	Legal information	Safety insert G11219579

Documents and certificates		Document name
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	CE Declaration ENDURA FLOOD SOLAR SEN REM
	Declarations of conformity UKCA	ENDURA FLOOD SOLAR SEN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854429477	Folding box 1	189 mm x 189 mm x 644 mm	2155.00 g	23.00 dm³
4099854429484	Shipping box 4	384 mm x 356 mm x 245 mm	8620.00 g	33.49 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.