

PRODUCT DATASHEET

SPOT MULTI 2 x 30W 3000K FL WT/BK

SPOT MULTI 2x30W | Recessed mounted spotlight, swivelable with two spot



Areas of application

- Accent- and general lighting for all kind of salesrooms
- Fashion shops, accessories shops
- Shops, boutiques
- Hotel rooms
- Cafés

Product benefits

- Low flicker light thanks to special electronic control gear
- High luminous efficacy
- Covering against other ceiling installations thanks to closed sheet steel housing
- Easy replacement of external driver thanks to plug with bayonet lock
- Functional and minimalistic design
- 5 years guarantee

Product features

- Large faceted reflector for high light output
- Beam angle: 38°
- Gimbal adjustment angle: +/- 25°



TECHNICAL DATA


Electrical data

Nominal wattage	2*30 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	270 mA
Inrush current	46 A
Inrush current time T_{h50}	< 3.4 μ s
Max. number of luminaires per miniature circuit breaker B16	16
Max. number of luminaires per miniature circuit breaker C10	13
Max. number of luminaires per miniature circuit breaker C16	20
Power factor λ	≥ 0.90
Total harmonic distortion	< 15 %
Protection class	II
Operating mode	External LED driver


Photometrical data

Luminous flux	2*2700 lm
Luminous efficacy	90 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	≤ 4 sdc _m
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG1
Beam angle	38 °

403 Forbidden




SP MULTI 2 x 30W3000K FL WT

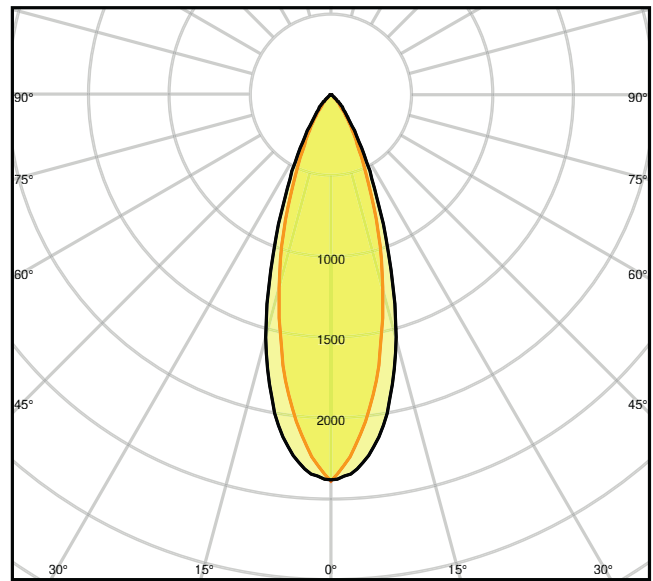

SP MULTI 2 x 30W3000K FL WT

Dimensions & Weight

Length	330.00 mm
Width	173.00 mm
Height	135.00 mm
Product weight	2700.00 g



SP MULTI 2 x 30W

Materials & Colors

Product color	White
Housing color	White

403 Forbidden

Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	650 °C

Application & Mounting

Ambient temperature range	-10...+40 °C
Type of connection	Screw terminal, 2-Pole (L,N)
Type of protection	IP20
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting length	320 mm
Mounting width	160 mm
Mounting depth	250 mm
Adjustable	Yes
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Lifespan L80/B10 at 25 °C	45000 h ¹⁾
Lifespan L80/B50 at 25 °C	45000 h
Lifespan L90/B10 at 25 °C	30000 h
Number of switching cycles	50000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

ECG - Length	113 mm
ECG - Width	40 mm
ECG - Height	25 mm

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / RoHS
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

403 Forbidden

Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------

Additional product data

BEG subsidy	No
-------------	----








EQUIPMENT / ACCESSORIES






- Driver included

Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- The luminaires are not suitable for covering with thermally insulated material.

DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	UI Spot Multi
	On-Pack-Info	Legal Insert Spot LED
	Legal information	LSI SP MULTI
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	EU Declaration of Conformity Spot Multi LEDV
	Declarations of conformity	Attestation-of-Conformity SP SQ and Multi TÜV
	Declarations of conformity UKCA	SP MULTI FL / SP SQUARE DK ADJ FL

	Photometric and lighting design files	Document name
	IES file (IES)	SP MULTI 2 x 30W3000K FL WT
	LDT file (Eulumdat)	SP MULTI 2 x 30W3000K FL WT
	ULD file (DIALux)	SPOTMULTI2x30W3000KFLWTBK
	ROLF file (RELUX)	SP MULTI 2X30W-3000K
	UGR file (UGR table)	SP MULTI 2 x 30W3000K FL WT

403 Forbidden

Photometric and lighting design files		Document name
<input type="checkbox"/>	Light distribution curve type cone	SP MULTI 2 x 30W3000K FL WT
<input type="checkbox"/>	Light distribution curve type polar	SP MULTI 2 x 30W3000K FL WT

CAD/BIM files		Document name
<input type="checkbox"/>	BIM Revit 3D	Spot Multi
<input type="checkbox"/>	CAD STEP 3D	SP MULTI 2x30W


Tender texts		Document name
<input type="checkbox"/>	Tender documents	SPOT MULTI 2x30W 3000K FL WTBK-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075113961	Folding box 1	210 mm x 355 mm x 175 mm	2810.00 g	13.05 dm ³
4058075113978	Shipping box 4	730 mm x 220 mm x 355 mm	11996.00 g	57.01 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

403 Forbidden