

# PRODUCT DATASHEET

## TruSys® DA 53 W 3000 K SI

TruSys® DOUBLE ASYMMETRIC | Luminaire inserts with double asymmetrical light distribution

---

### Areas of application

- Direct replacement for luminaires with compact fluorescent lamps
- Discounters, supermarkets



---

### Product benefits

- Innovative optical design with a rod lense-technology over the entire length of the luminaire
- Internal holders prevent the luminaire from falling while being mounted
- Easy electrical and mechanical connection to the mounting rail via snap-in mounting
- Bidirectional light distribution for lighting and accentuation of shelves
- Clean look as mounting brackets are not visible when mounted
- Plug-and-play system allows easy installation
- High-value design
- Rows of up to 81 (On-Off) / 91 (DALI) luminaires and an overall length of 124 m (On-Off) / 151 m (DALI) possible
- Energy savings of up to 65 % compared to luminaires with 2 x 80 W T5 lamps
- Version with DALI ECG available

---

### Product features



- Double asymmetric wallwasher light distribution with beam angle  $2 \times 35^\circ$
- Luminous efficacy: up to 135 lm/W
- Fixed energy taps for electrical connection
- High-quality aluminum casing
- Type of protection: IP20
- Follows the unified LEDVANCE design language (SCALE design)


## TECHNICAL DATA

### Electrical data


Nominal wattage	53.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	220 mA
Inrush current	30 A
Inrush current time $T_{h50}$	250 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	16
Max. number of luminaires per miniature circuit breaker C10	15
Max. number of luminaires per miniature circuit breaker C16	27
Power factor $\lambda$	$\geq 0.95$
Total harmonic distortion	< 6.1 %
Protection class	I
Operating mode	Integrated LED driver

### Photometrical data

Luminous flux	6400 lm
Luminous efficacy	120 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	$\leq 3$ sdc <sub>m</sub>
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG1
Beam angle	2 x 35 °

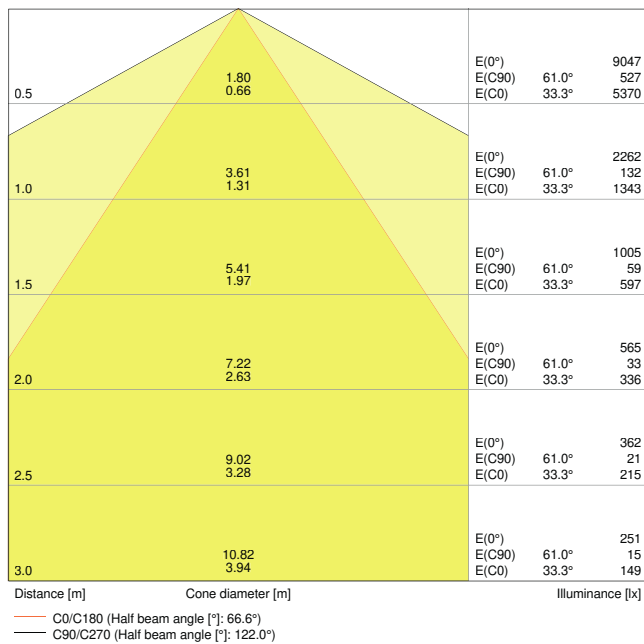

LEDVANCE TruSys LED 53W 3000K DA SI

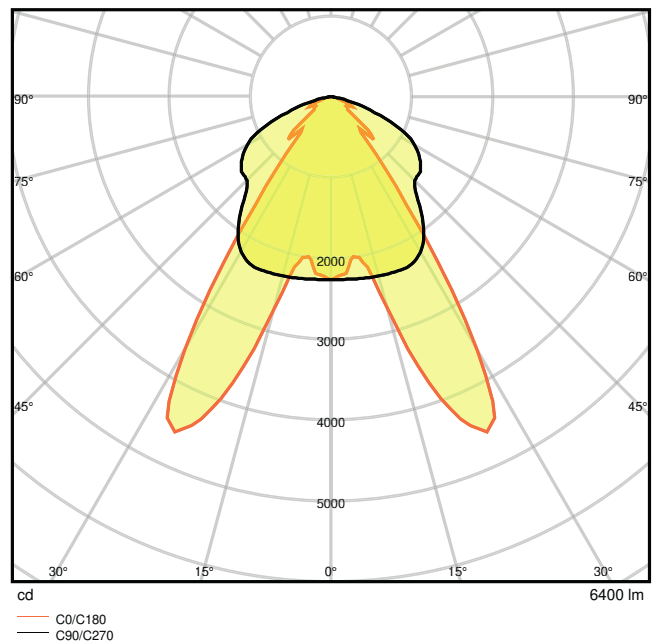

LEDVANCE TruSys LED 53W 3000K DA SI

### Dimensions & Weight

Length	1534.00 mm
Width	71.00 mm
Height	53.00 mm
Product weight	1740.00 g



### Materials & Colors

Product color	Silver
Housing color	Silver
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polycarbonate (PC)

Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+45 °C
Type of connection	Plug-In connection
Type of protection	IP20
Protection class IK (shock resistance)	IK07
Dimmable	No
Mounting type	Suspended/Surface
Mounting location	Mounting rail
Application environment	Indoor
Replaceable light source (EPREL)	Not replaceable
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	75000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	50000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	50000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	100000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)


### Certificates & Standards




Standards	CE / CB / TÜV SÜD / ENEC / EAC / RoHS
Ball shot safe	No









### EQUIPMENT / ACCESSORIES



– Mounting rail with fixed integrated 5- (On-Off) / 7-pole (DALI) cable


### DOWNLOAD DATA

Documents and certificates	Document name
 User Instruction / Safety Instructions	UI_Trusys@ TRUNKING SYSTEM

Documents and certificates		Document name
	On-Pack-Info	Legal Insert TruSys
	Legal information	LS Insert Trusys LED
	Declarations of conformity	TRUSYS LED

Photometric and lighting design files		Document name
	IES file (IES)	TRUSYS LED 53W 3000K DA SI
	LDT file (Eulumdat)	LEDVANCE TruSys LED 53W 3000K DA SI
	ULD file (DIALux)	TruSysDOUBLEASYMMETRIC53W3000KSI
	ULD file (DIALux)	TRUSYS DOUBLE ASYMMETRIC 53W 3000K
	ROLF file (RELUX)	TRUSYS LED 53W 3000K
	UGR file (UGR table)	LEDVANCE TruSys LED 53W 3000K DA SI
	LDC typ cone	LEDVANCE TruSys LED 53W 3000K DA SI
	LDC typ polar	LEDVANCE TruSys LED 53W 3000K DA SI

CAD/BIM files		Document name
	BIM_Revit_3D	TRUSYS 1500 3000 4500
	CAD_STEP_3D	TRUSYS 1500

Tender texts		Document name
	Tender documents	TruSys DOUBLE ASYMMETRIC 53 W 3000 K SI-EN

**LOGISTICAL DATA**

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075100633	Folding box 1	58 mm x 1,552 mm x 82 mm	1905.00 g	7.38 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075100640	Shipping box 3	1,561 mm x 186 mm x 94 mm	6140.00 g	27.29 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.