


# PRODUCT DATASHEET

## LED VALUE LINEAR HIGHBAY 50W 865 NW

LED VALUE LINEAR HIGHBAY | High-bay luminaires

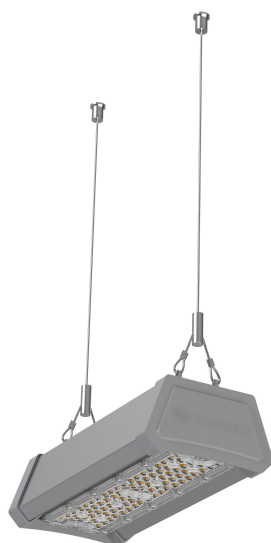

### Areas of application

- Factory
- Warehouses
- Distribution centre
- Other high ceiling indoor application

### Product benefits

- Energy savings thanks to system efficacy up to 135 lm/W
- 1-10 dimming provides additional energy saving
- 3 kinds of beam angle available, Narrow (60°), Wide (90°) and High rack optic (30° x 90°), can meet different application requirements
- IP44, can be used in indoor wet environment
- Low maintenance costs thanks to long lifetime 50,000 hrs @ 35 °C

### Product features

- Available in 4 lengths: 252 mm, 491 mm, 730 mm and 969 mm
- Available with wattage: 50 W, 100 W, 150 W and 200 W
- Surge protection: up to 4 kV (L/N-PE), 2 kV (L-N)
- Available in sling suspended and bracket mounted
- Certificate: CB, RoHS

## TECHNICAL DATA

### Electrical data


Nominal wattage	50.00 W
Nominal voltage	100...240 V
Mains frequency	50...60 Hz
Nominal current	550.000 mA
Max. number of luminaires per miniature circuit breaker B16	2
Max. number of luminaires per miniature circuit breaker C16	2
Power factor $\lambda$	> 0.90
Total harmonic distortion	< 20 %
Protection class	I

### Photometrical data

Luminous flux	6500 lm
Luminous efficacy	130 lm/W
Color temperature	6500 K
Light color (designation)	Daylight
Color rendering index Ra	80
Beam angle	60 °

### Dimensions & Weight

Length	252.00 mm
Width	129.00 mm
Height	70.00 mm
Product weight	900.00 g



LDVAL LINEAR HB 50W

### Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Aluminum
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

## Application & Mounting

Ambient temperature range	-20...+45 °C
Type of connection	Terminal
Type of protection	IP44
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	1-10V
Mounting type	Suspended/Surface
Application environment	Indoor
Mounting length	252 mm
Mounting width	129 mm
LED module replaceable	Not replaceable
With light source	Yes


## Certificates & Standards

Ball shot safe	No
----------------	----

## Additional product data

Number of illuminants	no
-----------------------	----

## DOWNLOAD DATA

Photometric and lighting design files		Document name
	IES file (IES)	LDVAL LINEAR HB 50W 865 NW

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075660014	Folding box 1	300 mm x 105 mm x 155 mm	1027.00 g	4.88 dm <sup>3</sup>
4058075660021	Shipping box 10	570 mm x 315 mm x 330 mm	11195.00 g	59.25 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.