

# PRODUCT DATASHEET

## DP COMPACT 1200 23W/3000K IP66 GR

DAMP PROOF COMPACT GEN 1 | Damp-proof luminaire, through-wired (L, N, E)

### Areas of application

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines



### Product benefits

- Evenly distributed light
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Easy access to electrical terminal thanks to end caps with twist and lock mechanism
- Tool-free electrical connection due to push button connector
- 5 years guarantee

### Product features

- High luminous efficacy: up to 120 lm/W
- Type of protection: IP66
- Beam angle: 120°
- Through-wiring 3x1.5mm<sup>2</sup> already installed



– Polycarbonate housing


## TECHNICAL DATA

### Electrical data


|   |                       |
|---|-----------------------|
| Nominal wattage   | 23.00 W               |
| Nominal voltage   | 220...240 V           |
| Mains frequency   | 50...60 Hz            |
| Nominal current   | 130 mA                |
| Inrush current  | 11 A                  |
| Inrush current time $T_{h50}$                               | 160 $\mu$ s           |
| Max. number of luminaires per miniature circuit breaker B16 | 37                    |
| Max. number of luminaires per miniature circuit breaker C10 | 31                    |
| Max. number of luminaires per miniature circuit breaker C16 | 50                    |
| Power factor $\lambda$                                      | > 0.90                |
| Total harmonic distortion                                   | 20 %                  |
| Protection class  | II                    |
| Operating mode  | Integrated LED driver |

### Photometrical data

|  |                           |
|--|---------------------------|
| Luminous flux                                | 2600 lm                   |
| Luminous efficacy                            | 115 lm/W                  |
| Color temperature                            | 3000 K                    |
| Light color (designation)                    | Warm White                |
| Color rendering index Ra                     | > 80                      |
| Standard deviation of color matching         | $\leq 5$ sdc <sub>m</sub> |
| Low flicker                                  | Yes                       |
| Flickering metric (Pst LM)                   | $\leq 1$                  |
| Stroboscope effect metric (SVM)              | $\leq 0.9$                |
| Photobiological safety group acc. to EN62778 | RG0                       |
| Beam angle                                   | 120 °                     |

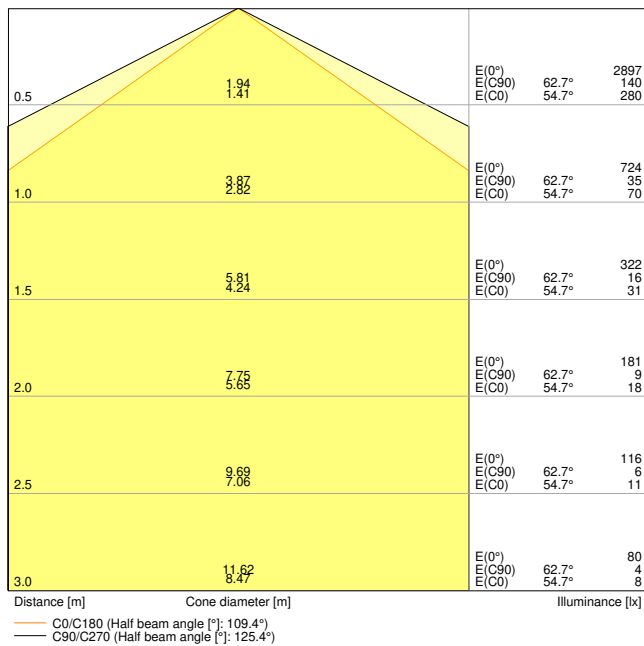


DP Compact 1200 23W 3000K GR IP66

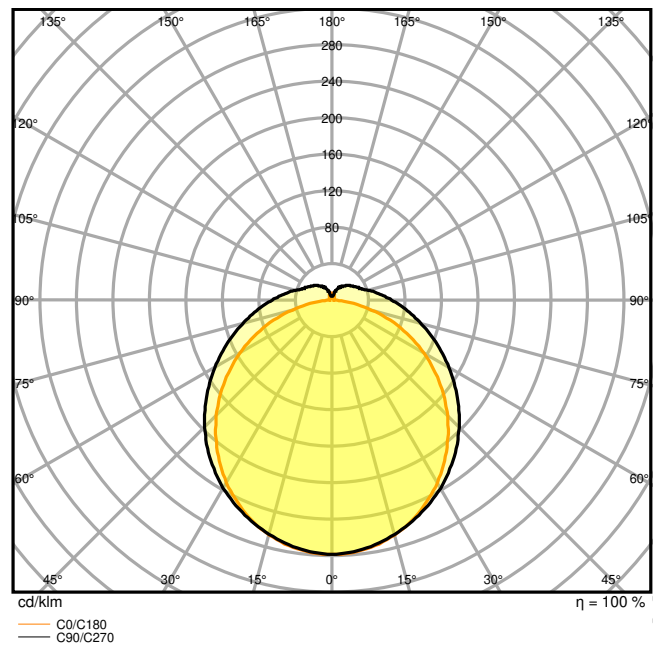

DP Compact 1200 23W 3000K GR IP66

Dimensions & Weight

|                |            |
|----------------|------------|
| Length         | 1290.00 mm |
| Width          | 86.00 mm   |
| Height         | 68.00 mm   |
| Product weight | 1120.00 g  |



Dampproof Compact 1200 IP65

Materials & Colors

|  |                    |
|--|--------------------|
| Product color                              | Gray               |
| Housing color                              | Gray               |
| Body material                              | Polycarbonate (PC) |
| Cover material                             | Polycarbonate (PC) |
| Light emitting surface material            | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 850 °C             |

|                 |        |
|-----------------|--------|
| Mercury content | 0.0 mg |
|-----------------|--------|

### Application & Mounting

|  |                            |
|--|----------------------------|
| Ambient temperature range              | -35...+50 °C               |
| Temperature range at storage           | -40...+70 °C               |
| Type of connection                     | Screwless terminal, 3-Pole |
| Type of protection                     | IP66                       |
| Protection class IK (shock resistance) | IK08                       |
| Dimmable                               | No                         |
| Mounting type                          | Suspended/Surface          |
| Mounting location                      | Ceiling / Wall             |
| Application environment                | Indoor                     |
| With light source                      | Yes                        |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 35000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 35000 h               |
| Lifespan L90/B10 at 25 °C  | 20000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                |        |
|----------------|--------|
| Output current | 270 mA |
|----------------|--------|

### Certificates & Standards

|  |                                      |
|--|--------------------------------------|
| Standards  | CE / CB / TÜV SÜD / EAC / RoHS / EPD |
| Luminaire with limited surface temperature, "D sign" | Yes                                  |
| Ball shot safe                                       | No                                   |
| EPD  | LEDV-00003-V01.01-EN                 |
| Replaceable light source (EPREL)                     | Not replaceable                      |

### Additional product data

|              |    |
|--------------|----|
| BEG eligible | No |
|--------------|----|














### EQUIPMENT / ACCESSORIES



- Stainless steel clamps with safety screws included
- Mounting accessories included (suspension kit, theft protection kit)

### Safety advice


- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

### DOWNLOAD DATA

| Documents and certificates   |  | Document name                      |
|--|--|------------------------------------|
|    | User Instruction / Safety Instructions | UI_DP COMPACT                      |
|    | Legal information                      | LS Insert DP COMPACT               |
|    | Legal information                      | Informationstext 18 Abs 4 ElektroG |
|    | Declarations of conformity             | DP COMPACT                         |
|  | Declarations Of Conformity UKCA        | DP Compact 1200 GR IP66            |
| Photometric and lighting design files  |  | Document name                      |
|  | IES file (IES)                         | DP Compact 1200 23W 3000K GR IP66  |
|  | LDT file (Eulumdat)                    | DP Compact 1200 23W 3000K GR IP66  |
|  | ULD file (DIALux)                      | DP COMPACT 1200 23W 3000K GR IP66  |
|  | ROLF file (RELUX)                      | DP COMPACT 1200 23W 3000K IP66 GR  |
|  | UGR file (UGR table)                   | DP Compact 1200 23W 3000K GR IP66  |
|  | UGR file (UGR table)                   | DP Compact 1200 23W 3000K GR IP66  |
|  | LDC typ cone                           | DP Compact 1200 23W 3000K GR IP66  |
|  | LDC typ polar                          | DP Compact 1200 23W 3000K GR IP66  |

| CAD/BIM files  |              | Document name         |
|--|--------------|-----------------------|
|  | BIM_Revit_3D | Damp Proof Compact G1 |
|  | CAD_STEP_3D  | DP COMP 1200          |






| Tender texts   |                  | Document name                                    |
|--|------------------|--|
|  | Tender documents | DAMP PROOF COMPACT IP66 1200 23W3000K IP66 GR-EN |

**LOGISTICAL DATA**

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075424227 | Folding box<br>1             | 72 mm x 1,319 mm x 90 mm             | 1310.00 g    | 8.55 dm <sup>3</sup>  |
| 4058075424234 | Shipping box<br>6            | 1,340 mm x 200 mm x 240 mm           | 8140.00 g    | 64.32 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**ADDITIONAL CATALOG INFORMATION**



**References / Links**

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.