

# PRODUCT DATASHEET

## O FACADE LANTERN 12 W 3000 K IP54 GY

OUTDOOR FACADE LANTERN | Contemporary lanterns with light guide for low-glare illumination



### Areas of application

- Outdoor
- Building facades
- Gardens, balconies and other outdoor areas

### Product benefits

- Energy-efficient thanks to LED technology
- 5 years guarantee
- Easy and quick installation
- Special light guide design for low-glare illumination

### Product features

- Bright and functional outdoor LED luminaires
- Type of protection: IP54
- Die-cast aluminum housing
- Diffuser made of opal polycarbonate with transparent polycarbonate cover




---

**TECHNICAL DATA****Electrical data**


Nominal wattage	12.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	96 mA
Max. number of luminaires per miniature circuit breaker B16	33
Max. number of luminaires per miniature circuit breaker C10	42
Max. number of luminaires per miniature circuit breaker C16	26
Power factor $\lambda$	> 0.5
Protection class	I
Operating mode	Mains voltage

**Photometrical data**

Luminous flux	610 lm
Luminous efficacy	50 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	$\geq 80$
Standard deviation of color matching	< 6 sdc <sub>m</sub>
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	210 °

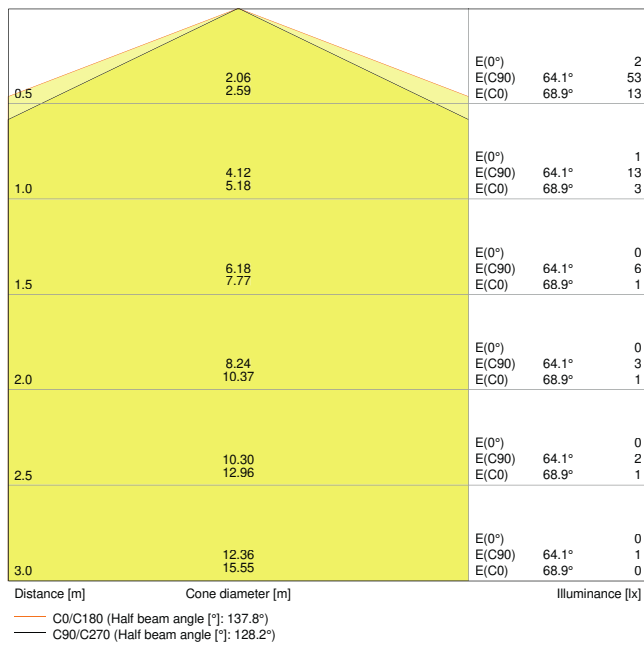


O Facade Lantern 12W3000K GY IP54

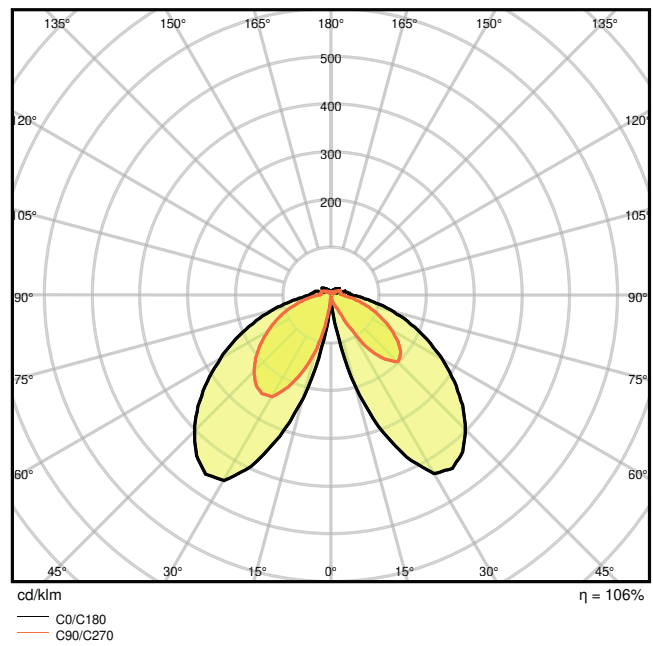

4058075074835 O Facade Lantern 12W3000K GY IP54

Dimensions & Weight

Length	176.00 mm
Width	110.00 mm
Height	240.00 mm
Product weight	1300.00 g

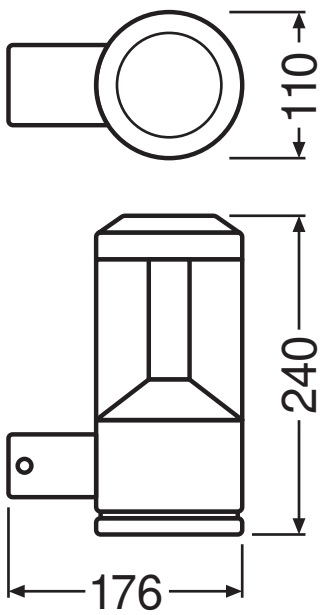

O FACADE LANTERN 12W/3000K  
GY IP54

### Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Aluminum
Cover material	Polycarbonate (PC)
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+40 °C
Type of connection	Screw terminal, 3-Pole
Type of protection	IP54
Protection class IK (shock resistance)	IK06
Dimmable	No
Mounting type	Surface
Mounting location	Wall
Application environment	Outdoor

### Lifespan

Lifespan L70/B50 at 25 °C	30000 h <sup>1)</sup>
Number of switching cycles	15000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Certificates & Standards

Standards	CE
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable









### Additional product data

BEG eligible	No
--------------	----

### EQUIPMENT / ACCESSORIES

– Complete mounting and connecting accessories included

### DOWNLOAD DATA

Documents and certificates		Document name
	User Instruction / Safety Instructions	User Instruction Outdoor Facade Lantern
	On-Pack-Info	Legal Insert OUTDOOR
	Declarations of conformity	EC declararion Outdoor
Photometric and lighting design files		Document name
	IES file (IES)	O Facade Lantern 12W3000K GY IP54
	LDT file (Eulumdat)	O Facade Lantern 12W3000K GY IP54
	UGR file (UGR table)	O Facade Lantern 12W3000K GY IP54
	LDC typ cone	O Facade Lantern 12W3000K GY IP54
	LDC typ polar	4058075074835 O Facade Lantern 12W3000K GY IP54

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075074835	Folding box 1	134 mm x 204 mm x 296 mm	1370.00 g	8.09 dm <sup>3</sup>
4058075074842	Shipping box 4	425 mm x 285 mm x 315 mm	5822.00 g	38.15 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.