


# PRODUCT DATASHEET

## STREETLIGHT VALUE 210 W 3000 K

LED VALUE STREETLIGHT | Streetlights

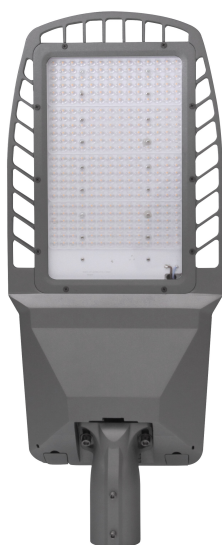

### Areas of application

- Streets
- Road lighting
- Car parks

### Product benefits

- Mast adapter with adjustable tilt angle
- High transparence cover made of ultra white tempered glass
- Homogeneous luminance distribution and minimized glare thanks to optical lense
- Maintenance comfort thanks to module assembly concept
- High quality aluminum housing

### Product features

- Surge protection: up to 10 kV (L-N)
- Lifetime(L70): up to 50,000 h (temperature at  $t_a = 50\text{ °C}$ )
- Type of protection: IP66
- Impact resistance: IK08
- High luminous efficacy: up to 120 lm/W



## TECHNICAL DATA

### Electrical data

Nominal wattage	210.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Protection class	I

### Photometrical data

Luminous flux	25200 lm
Luminous efficacy	120 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	70
Standard deviation of color matching	≤5 sdcn
Beam angle	50° x 150 °

### Dimensions & Weight

Length	770.00 mm
Width	304.00 mm
Height	155.00 mm
Product weight	8900.00 g

### Materials & Colors

Product color	Gray
Housing color	Gray
Body material	Aluminum
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-30...+50 °C
Temperature range at storage	-40...+70 °C
Type of connection	Terminal
Type of protection	IP66
Protection class IK (shock resistance)	IK08
Dimmable	No
Mounting location	Luminaire mast

Application environment	Outdoor
Replaceable light source	No

### Lifespan


Lifespan L70/B50 at 25 °C	50000 h <sup>1)</sup>
Number of switching cycles	50000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Certificates & Standards

Replaceable light source (EPREL)	Not replaceable
----------------------------------	-----------------

### DOWNLOAD DATA

Photometric and lighting design files		Document name
	IES file (IES)	STREETLIGHT VALUE L 210W 3000K

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075103399	Shipping box 1	715 mm x 360 mm x 225 mm	10144.00 g	57.92 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.